


| | |
|--------|------|
| LENGTH | 0.2M |
|--------|------|

ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE: 3 OHM MAX
3. INSULATION RESISTANCE: 5M OHM MIN
4. HI-POT TEST: DC 300V/10ms

| PIN ASSLGMENT | | |
|---------------|-------|-------|
| P1 | P2 | P3 |
| RCA M | RCA F | RCA F |
| PIN | PIN | PIN |
| Shell | Shell | Shell |

| NO. | Description | Q' TY | Unit |
|-----|---------------------------------------|-------|------|
| 6 | Cable: $\phi 2.6 * 2F$ / Color: Black | 1 | PCS |
| 5 | 45P Whied PVC | 6 | g |
| 4 | 45P Red PVC | 6 | g |
| 3 | 45P Black PVC | 6 | g |
| 2 | RCA Plug/NI | 1 | PCS |
| 1 | RCA Jack/NI | 2 | PCS |

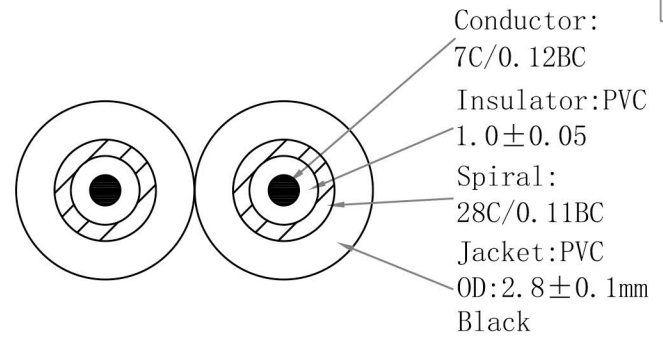

Weltron®

| | | | | | | |
|------------|-------------|------------|------|----------|---------------|-------|
| PROJECTION | TOLERANCE | DESIGNED | HZM | Part No: | 44-342 | SCALE |
| | 0 --5 ± 0.2 | CHECKAGE | | | | FREE |
| UNITS | mm | APPROVAL | | ITEM | RCA M-2*RCA F | SHEET |
| MODEL | A4 | ANGLE ± 3° | DATE | DWG NO. | WLD-TZ1802022 | 1/1 |