

Product Part Number

T2404L6P-XX

Product Description

- U/UTP, 23AWG solid bare copper, CAT.6, CMP
- With cross filler
- With rip cord

Product Features

- High performance.
- High quality of safety property.
- Sweep frequency up to 600 MHz.
- Reelex® II carton and easy to pull out.
- Carton with one layer corrugated design providing sufficient strength and saving packaging space.


Application

- Structure cabling for horizontal and building backbone cable.
- Transmission of digital and analog for data, video, and audio applications.
- IEEE 802.3ab 1000BASE-T, 1000BASE-TX, and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568-C.2 (2009)
 - ISO/IEC 11801 (Edition 2.2)
 - IEC 61156-5 (Edition 2.0)
- Flame Test
 - NFPA 262 (CMP)
- Material and Construction
 - UL 444
 - CSA 22.2 NO.214
- EU Directive 2011/65/EC (RoHS2)
- EU Directive 2006/95/EC (LVD)
- CE compliance date: 2010.01.01

Sectional Drawing

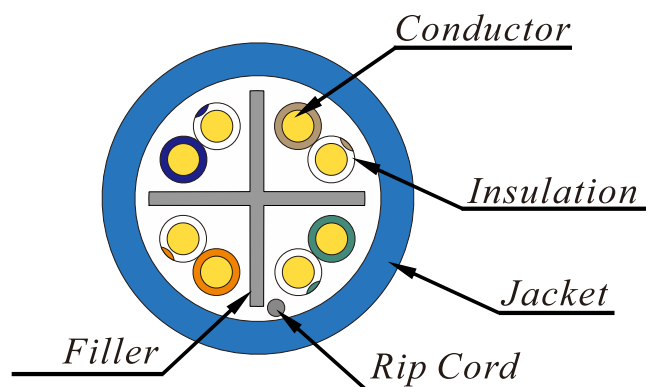

Establish Date	2021.06.20	Edition	1.0	Revised Date	
----------------	------------	---------	-----	--------------	--

Specification

Material and Construction

Conductor	Material	23AWG solid bare copper	
Insulation	Material	Fluorinated Ethylene Propylene (FEP)	
	Color code & diameter	Blue & white/blue Stripe	0.95 ± 0.02 mm
		Orange & white/orange stripe	0.92 ± 0.02 mm
		Green & white/green stripe	0.94 ± 0.02 mm
	Brown & white/brown stripe	0.92 ± 0.02 mm	
Twisted	Description	Left-hand direction	
Filler	Material	Polyolefin (PO)	
Assembly	Description	Left-hand direction	
Rip cord	Material	Polyester multi-yarn	
Jacket	Material	Low smoke flame retardant polyvinyl chloride (LSFRPVC)	
	Diameter	5.6 ± 0.2 mm	
	Thickness	0.38 ± 0.03 mm	
	Color	Ash, Black, Blue, Green, Orange, Purple, Red, White, Yellow	
Marking	CATEGORY 6 CABLE E465248 0100 23AWG CMP (UL) C(UL) ??? FT yyww¹		
	Note 1: yyww is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius		≥ 4 times of overall diameter
Maximum pulling tension		≤ 110 N

Specification

Physical & Electrical Characteristics (at 20°C)

Temperature rating	75°C
Spark test	2.5 KV DC
AC leakage current through the overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 9.38 Ω/100m
Resistance unbalance	≤ 5%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ · m
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

Transmission Performance (at 20°C)

Frequency (MHz)	IL	NEXT	PS.NEXT	ACR	PS.ACR	ACRF	PS.ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	2.03	80.30	78.30	78.28	76.28	73.80	70.80	20.00	570.00	45.00
4	3.78	71.27	69.27	67.49	65.49	61.76	58.76	23.01	552.00	
8	5.32	66.75	64.75	61.43	59.43	55.74	52.74	24.52	546.73	
10	5.95	65.30	63.30	59.35	57.35	53.80	50.80	25.00	545.38	
16	7.55	62.24	60.24	54.68	52.68	49.72	46.72	25.00	543.00	
20	8.47	60.78	58.78	52.31	50.31	47.78	44.78	25.00	542.05	
25	9.51	59.33	57.33	49.83	47.83	45.84	42.84	24.32	541.20	
31.25	10.67	57.88	55.88	47.20	45.20	43.90	40.90	23.64	540.44	
62.5	15.38	53.36	51.36	37.98	35.98	37.88	34.88	21.54	538.55	
100	19.80	50.30	48.30	30.50	28.50	33.80	30.80	20.11	537.60	
150	24.71	47.66	45.66	22.95	20.95	30.28	27.28	18.87	536.94	
200	28.98	45.78	43.78	16.80	14.80	27.78	24.78	18.00	536.55	
250	32.85	44.33	42.33	11.48	9.48	25.84	22.84	17.32	536.28	
300	36.43	43.14	41.14	6.72	4.72	24.26	21.26	16.77	536.08	
350	39.79	42.14	40.14	2.35	0.35	22.92	19.92	16.30	535.92	
400	42.97	41.27	39.27	N.A.	N.A.	21.76	18.76	15.89	535.80	
450	46.01	40.50	38.50	N.A.	N.A.	20.74	17.74	15.53	535.70	
500	48.94	39.82	37.82	N.A.	N.A.	19.82	16.82	15.21	535.61	
550	51.76	39.19	37.19	N.A.	N.A.	18.99	15.99	14.92	535.54	
600	54.49	38.63	36.63	N.A.	N.A.	18.24	15.24	14.66	535.47	

Values above 250MHz are for information only.

Specification

Shipping Information


Item	Dimension	Nominal net weight
Cable	305 m	11.92 kg (26.27 lb)
Reelex II Carton	L386 x W270 x H370 mm	1120 g
Pallet	1150 x1150 x120 mm	14.1 kg

Container type	Capacity of pallet	Capacity of carton
20 feet	20	500
40 feet	40	1000

Shipping could use a standard delivery form or per the customer's request.


Schematic Drawing of Carton

One layer corrugated Reelex II carton.




Schematic Drawing of Package

Each package of pallets is delivered with plastic wrap, a packing strap, and a paper corner protector.

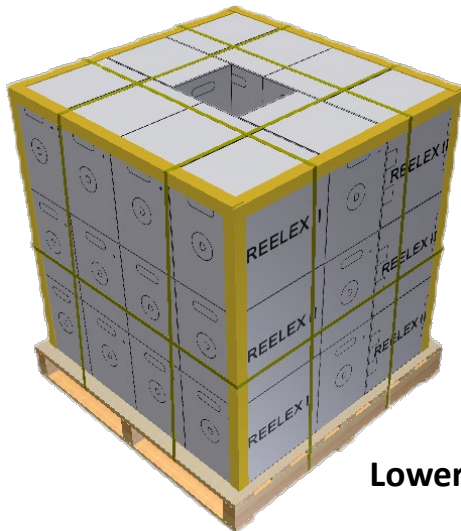

Lower Pallet

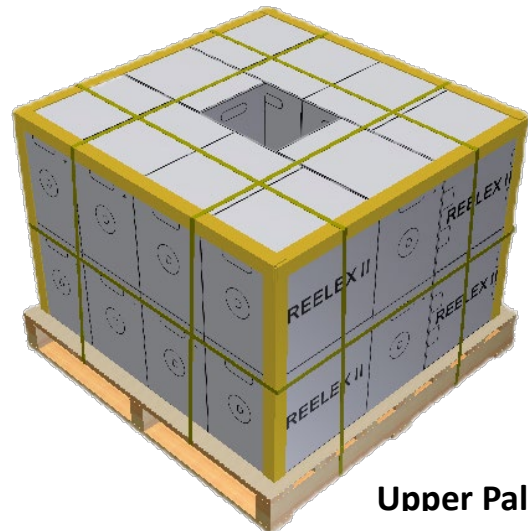

Upper Pallet

MAKER : *H. C. KUO*

CONFIRM : *C. Y. Chen*

APPROVAL : *W. J. Wang*