





ROHS Compliant

44-130C-58

REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

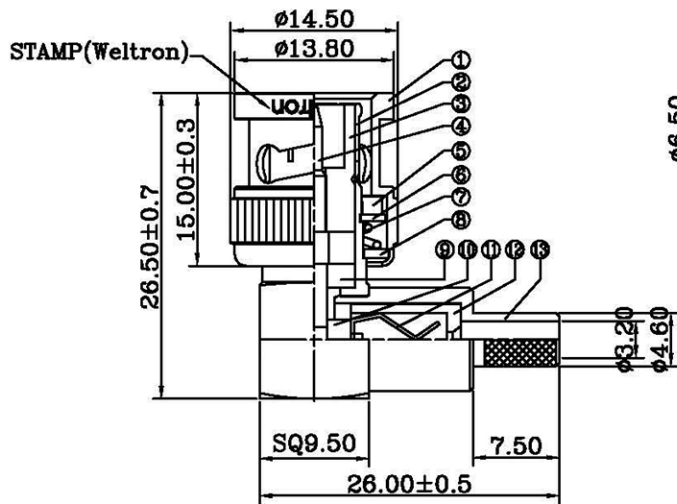

RECOMMENDED  
CABLE STRIPPING DIM'S

- 1.CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2.CONTACT PIN TO SOLDER

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.PHOSPHOR BRONZE PER QQ-B-750
- 3.TEFLON MIL-P-19468
- 4.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 5.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 6.JIS H 3250,C 2700

15	FERRULE	NOTE6	1	NOTE4
14	FERRULE	NOTE6	1	NOTE4
13	REAR BODY	NOTE1	1	NOTE4
12	INSULATOR	PP	1	NATURAL
11	SPRING PIN	NOTE2	1	NOTE5
10	CONTACT PIN	NOTE1	1	NOTE5
9	INSULATOR	NOTE3	1	WHITE
8	WASHER	IRON	1	NOTE4
7	SPRING	65Mn	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE4
5	GASKET	RUBBER	1	RED
4	CENTER PIN	NOTE1	1	NOTE5
3	INSULATOR	NOTE3	1	WHITE
2	BODY	NOTE1	1	NOTE4
1	SHELL	NOTE1	1	NOTE4
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

<b>Weltron</b> <sup>®</sup>				TITLE R/A BNC MALE TYPE (FOR RG58, RG58A, RG141, LMRI95, RG58U-PLENUM CABLE)		
Date	2012/12/07	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	DESIGNED	<i>Ckq</i>
DRAWING NO.		SCALE	FIT		ANGLES ±6°	DRAWING
MODEL NO.					CHECKED	<i>David</i>
PART NO.	44-130C-58	EDITION	A1	PUBLISH DATE	APPROVED	<i>Andy</i>