ROHS Compliant

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	Rejigger design: 1 Pin, 2 Ferrule	2012-12-26	A2	NQ
2				

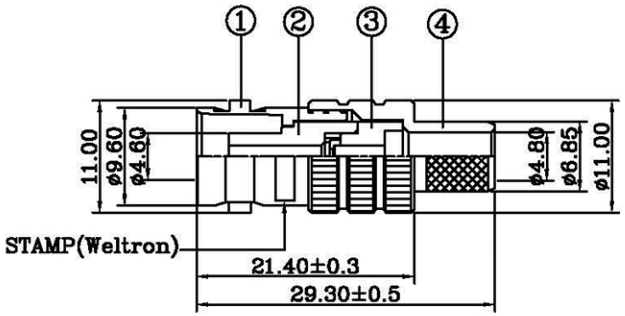





RG58U FERRULE



RG58U PIENUM FERRULE

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)
1.BRASS PER QQ-B-626
2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
4.JIS H 3250,C 2700

1.CRIMPED FERRULE HEX CRIMP SIZE .319"
2.CRIMPED CONTACT PIN HEX CRIMP SIZE .068" OR TO SOLDER



RECOMMENDED CABLE STRIPPING DIM'S

44-283-6

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
7	FERRULE	NOTE 4	1	NOTE 2
6	FERRULE	NOTE 4	1	NOTE 2
5	CONTACT PIN	NOTE 1	1	NOTE 3
4	REAR BODY	NOTE 1	1	NOTE 2
3	INSULATOR	POM	1	NATURAL
2	INSULATOR	POM	1	NATURAL
1	BODY	NOTE 1	1	NOTE 2

Weltron®

TITLE BNC FEMALE CRIMP TYPE 50 OHMS FOR RG6U,RG6U PIENUM CABLE

		UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15, 15-30 = ±0.30, 30-120 = ±0.60, >120 = ±1.00, ANGLES ±5°	DESIGNED: NQ
DRAWING NO.		SCALE	FIT		DRAWING: NQ
MODEL NO.					CHECKED: David
PART NO.	44-283-6	EDITION	A1	PUBLISH DATE: 2012/12/07	APPROVED: Andy
					3RD ANGLE