





ROHS Compliant

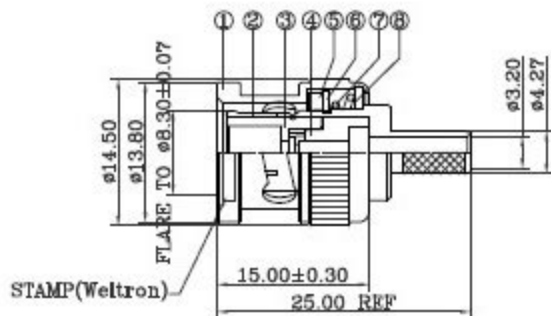

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

REVISIONS				
RevNo	Description	Date	Revision	Mender
1				
2				



RECOMMENDED
CABLE STRIPPING DIM'S

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

10	FERRULE	NOTE 4	1	NOTE 2
9	CONTACT PIN	NOTE 1	1	NOTE 3
8	WASHER	IRON	1	NOTE 2
7	SPRING	65Mn	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron ®				TITLE			
PART NO. 44-290-223		UNITS	MM	BNC CRIMP PLUG 50 OHMS (FOR RG223 CABLE)			
MODEL NO.		SCALE	FTT	UNLESS OTHERWISE SPECIFIED TOLERANCES:		DESIGNED	<i>Xwj</i>
DRAWING NO.		EDITION	A1	0.5-15 - ±0.15	ANGLES ±3°	DRAWING	<i>Ckg</i>
CAD FILE		Yin sheng/Yifaxing/SB/SB105		15-30 - ±0.30		CHECKED	<i>David</i>
				30-120 - ±0.60		APPROVED	<i>Andy</i>
				>120 - ±1.00			
				PUBLISH DATE		2009/11/24	
						3RD ANGLE	