


ROHS Compliant


# REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

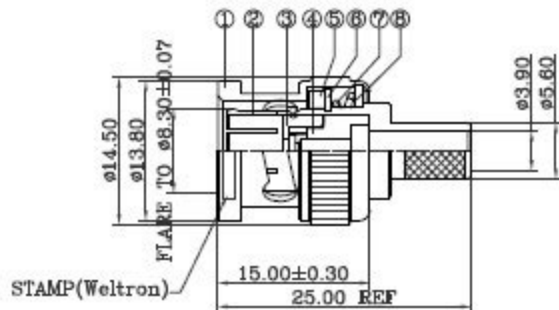


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)


1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. JIS H 3250, C 2700




(RG59U, RG62U)




(RG59U-PLENUM)



(RG59U, RG62U)



(RG59U-PLENUM)



RECOMMENDED  
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE  
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

12	FERRULE	NOTE 4	1	NOTE 2
11	FERRULE	NOTE 4	1	NOTE 2
10	CONTACT PIN	NOTE 1	1	NOTE 3
9	CONTACT PIN	NOTE 1	1	NOTE 3
8	WASHER	IRON	1	NOTE 2
7	SPRING	65Mn	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

Weltron®				TITLE BNC CRIMP PLUG 75 OHMS (FOR RG59U, RG62U, RG59U-PLENUM CABLE)							
PART NO.	44-290-75	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 ±0.15 15-30 ±0.30 30-120 ±0.60 >120 ±1.00	DESIGNED	Xwj					
		SCALE	FTT		ANGLES ±5°	DRAWING	Ckq				
			CHECKED	David							
DRAWING NO.			0121-0112B-303	EDITION	A1	PUBLISH DATE	APPROVED	Andy			
CAD FILE			Yin sheng/Yifaxing/SB/SB105			2009/11/24			☐ ⊗ 3RD ANGLE		