

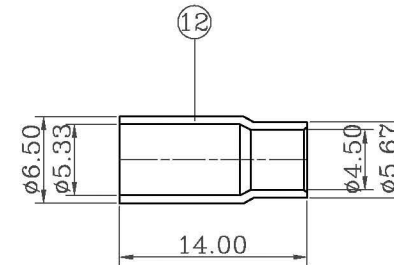





ROHS Compliant

REVISIONS

| RevNo | Description | Date | Revision | Mender |
|-------|-------------|------|----------|--------|
| 1 | | | | |
| 2 | | | | |

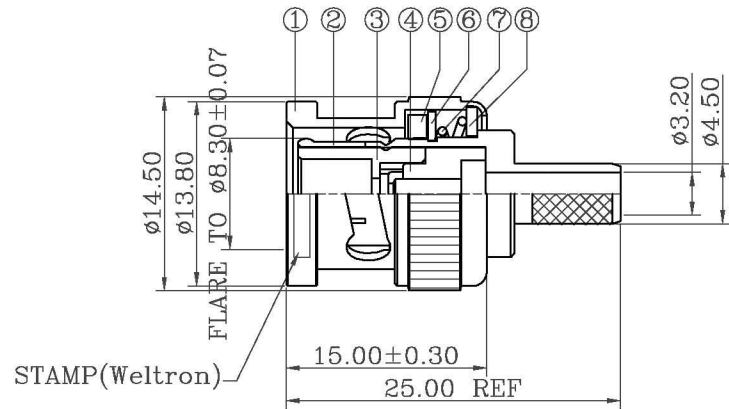

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RECOMMENDED
CABLE STRIPPING DIM'S

44-332TN

| | | | | |
|------|---------------|----------|------|----------|
| 12 | FERRULE | NOTE 4 | 1 | NOTE 2 |
| 11 | FERRULE | NOTE 4 | 1 | NOTE 2 |
| 10 | CONTACT PIN | NOTE 1 | 1 | NOTE 3 |
| 9 | CONTACT PIN | NOTE 1 | 1 | NOTE 3 |
| 8 | WASHER | IRON | 1 | NOTE 2 |
| 7 | SPRING | 65Mn | 1 | NATURAL |
| 6 | RETAINER RING | 65Mn | 1 | NOTE 2 |
| 5 | GASKET | RUBBER | 1 | RED |
| 4 | INSULATOR | POM | 1 | NATURAL |
| 3 | INSULATOR | POM | 1 | NATURAL |
| 2 | BODY | NOTE 1 | 1 | NOTE 2 |
| 1 | SHELL | NOTE 1 | 1 | NOTE 2 |
| ITEM | DESCRIPTION | MATERIAL | Q'TY | FINISHED |

| | | | | | | |
|-----------------------------|----------|---------|-----|---|--------------|----------|
| weltron [®] | | | | TITLE BNC CRIMP PLUG 50 OHMS (FOR RG58,RG58A,RG141,LMR195,RG58U-PLENUM CABLE) | | |
| | | | | UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES ±3° 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00 | | DESIGNED |
| PART NO. | 44-332TN | UNITS | MM | DRAWING | <i>Ckq</i> | |
| MODEL NO. | | SCALE | FIT | CHECKED | <i>David</i> | |
| DRAWING NO. | | EDITION | A1 | APPROVED | <i>Andy</i> | |
| CAD FILE | | | | PUBLISH DATE | 2009/11/24 | |
| | | | | 3RD ANGLE | | |