
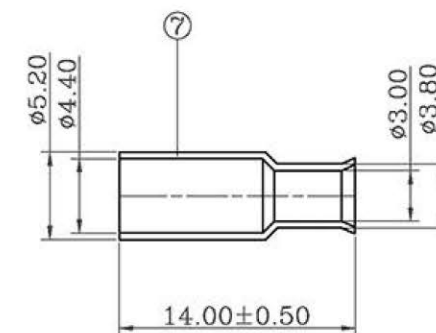




ROHS Compliant


REVISIONS				
RevNo	Description	Date	Revision	Mender
1				
2				

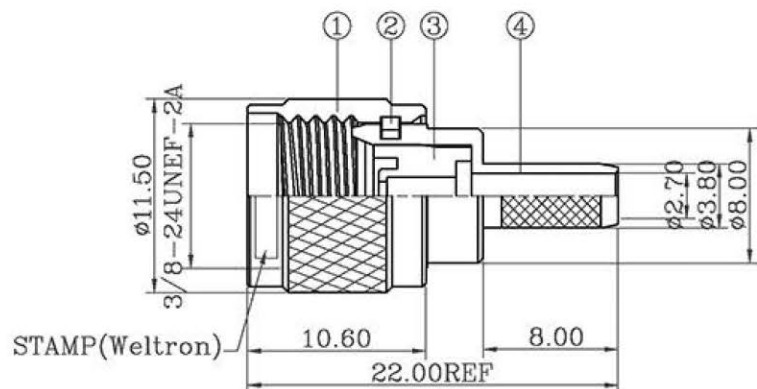

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. JIS H 3250, C 2700

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" OR CONTACT PIN TO SOLDER

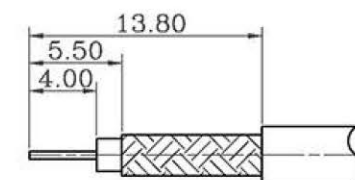

RECOMMENDED
CABLE STRIPPING DIM'S

7	FERRULE	NOTE 4	1	NOTE 2
6	SLEEVE	DELIN	1	NATURAL
5	CONTACT PIN	NOTE 1	1	NOTE 3
4	REAR BODY	NOTE 1	1	NOTE 2
3	INSULATOR	POM	1	NATURAL
2	RETAINER RING	NOTE 1	1	NATURAL
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron®				TITLE Mini-UHF CRIMP PLUG CRIMP FOR RG-174,188,316/U		
PART NO.	44-895-174	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00 ANGLES ±5°	DESIGNED	NQ
		SCALE	FIT		DRAWING	NQ
MODEL NO.					CHECKED	David
		EDITION	A1		APPROVED	Andy
CAD FILE				PUBLISH DATE	2010/01/03	3RD ANGLE