





ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

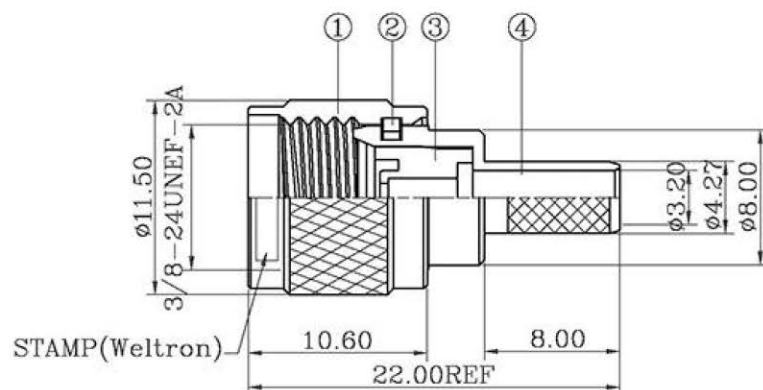

- 1.CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN HEX CRIMP SIZE .068"
OR CONTACT PIN TO SOLDER

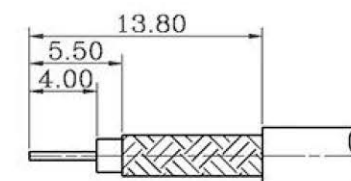

RECOMMENDED
CABLE STRIPPING DIM'S

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1.BRASS PER QQ-B-626
 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN.
 THICK OVER COPPER STRIKE
 4.JIS H 3250,C 2700

6	FERRULE	NOTE 4	1	NOTE 2
5	CONTACT PIN	NOTE 1	1	NOTE 3
4	REAR BODY	NOTE 1	1	NOTE 2
3	INSULATOR	POM	1	NATURAL
2	RETAINER RING	NOTE 1	1	NATURAL
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

Weltron®				TITLE Mini-UHF CRIMP PLUG CRIMP FOR RG55,142,223U		
PART NO.	44-895-223	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES 15-30 = ±0.30 ±5° 30-120 = ±0.60 >120 = ±1.00	DESIGNED	NQ
		SCALE	FIT		DRAWING	NQ
MODEL NO.				PUBLISH DATE	CHECKED	David
		EDITION	A1		APPROVED	Andy
CAD FILE				2010/01/03	3RD ANGLE	