
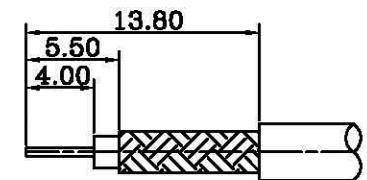
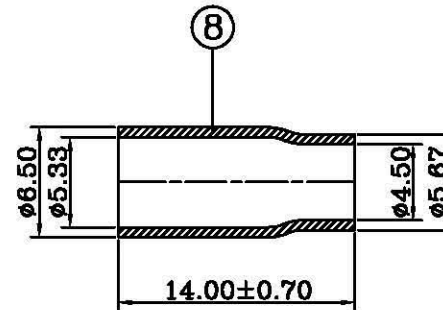
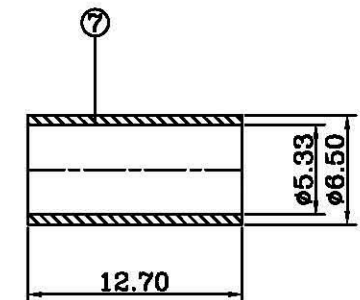




ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1	AUGMENT CONTACT PIN AND FERRULE	2012/12/14	A2	Bzw
2				

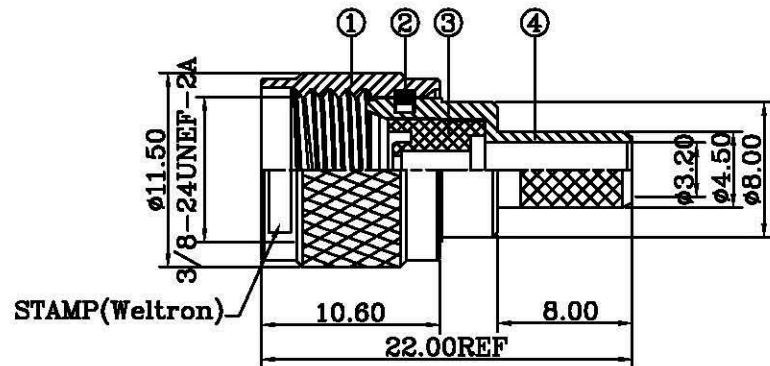

RECOMMENDED
CABLE STRIPPING DIM'S

- 1.CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN HEX CRIMP SIZE .068"
OR CONTACT PIN TO SOLDER

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN.
THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

8	FERRULE	NOTE 4	1	NOTE 2
7	FERRULE	NOTE 4	1	NOTE 2
6	CONTACT PIN	NOTE 1	1	NOTE 3
5	CONTACT PIN	NOTE 1	1	NOTE 3
4	REAR BODY	NOTE 1	1	NOTE 2
3	INSULATOR	POM	1	NATURAL
2	RETAINER RING	NOTE 1	1	NATURAL
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron®				TITLE Mini-UHF CRIMP PLUG CRIMP (FOR RG58,RG58A,RG141,LMR195,RG58U-PLENUM CABLE)			
PART NO.	44-895-58	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	ANGLES ±5°	DESIGNED	NQ
		SCALE	FIT			DRAWING	NQ
MODEL NO.				PUBLISH DATE		CHECKED	David
			EDITION			A1	APPROVED
CAD FILE	Yin sheng/Yifaxing/SMU/SMU701			2010/01/03		☐ ⊕ 3RD ANGLE	