





ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

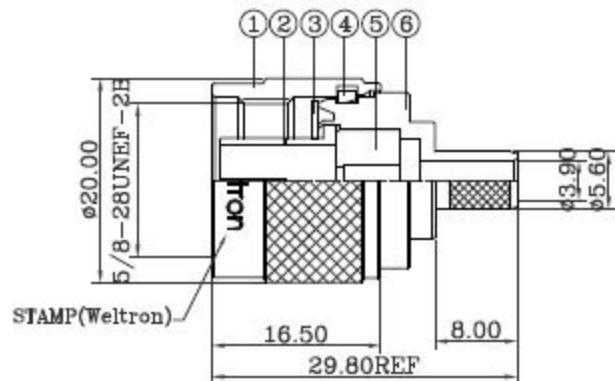

RECOMMENDED  
CABLE STRIPPING DIM'S

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- SILVER PL.100 MIN. THICK OVER COPPER STRIKE
- GOLD PL.3 MIN. THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- TEFLON ML-P-19468
- JIS H 3250,C 2700

- CRIMPED FERRULE  
HEX CRIMP SIZE .429"
- CRIMPED CONTACT PIN  
HEX CRIMP SIZE .100"  
OR TO SOLDER

8	FERRULE	NOTE 5	1	NOTE 2
7	CONTACT PIN	NOTE 1	1	NOTE 3
6	BODY	NOTE 1	1	NOTE 2
5	INSULATOR	NOTE 4	1	NATURAL
4	RETAINER RING	NOTE 1	1	NATURAL
3	GASKET	RUBBER	1	RED
2	OUT CONTACT	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

<b>Weltron</b> ®				TITLE	
PART NO.		44-262-59		N MALE CRIMP FOR RG59,62,140 & 210 CABLE	
MODEL NO.		EDITION A1		UNLESS OTHERWISE SPECIFIED TOLERANCES:	
CAD FILE		Yin sheng/Yifexing/SN/SN306		DESIGNED NQ	
		PUBLISH DATE		DRAWING NQ	
		2010/10/26		CHECKED David	
		APPROVED Andy		3RD ANGLE	