
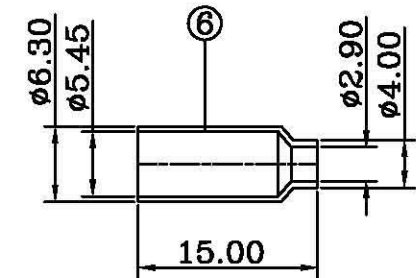




ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1	Change size Ø2.70 to Ø3.20,Ø3.80 to Ø4.80 and change ferrule	2013/01/31	A2	CKQ
2				

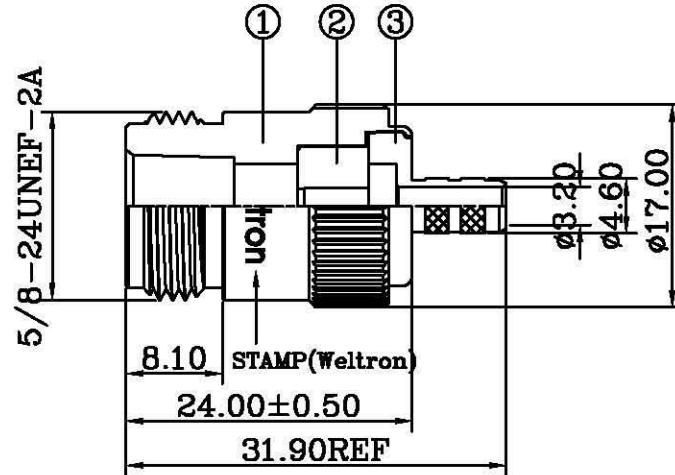

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.SILVER PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN .THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.TEFLON MIL-P-19468
- 5.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR TO SOLDER



RECOMMENDED
CABLE STRIPPING DIM'S

6	FERRULE	NOTE 5	1	NOTE 2
5	TUBE	POM		WHITE
4	CONTACT PIN	NOTE 1	1	NOTE 3
3	REAR BODY	NOTE 1	1	NOTE 2
2	INSULATOR	NOTE 4	1	NATURAL
1	BODY	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron [®]				TITLE N CRIMP JACK CRIMP, 50 OHM FOR RG174U,RG316U,Beden8216 CABLE			
PART NO.	44-263-174	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES:	DESIGNED	<i>Ckq</i>	
		SCALE	FIT			DRAWING	<i>Ckq</i>
MODEL NO.				0.5-15 = ±0.15	ANGLES ±5°	CHECKED	<i>David</i>
				15-30 = ±0.30		APPROVED	<i>Andy</i>
		EDITION	A1	PUBLISH DATE			
CAD FILE	Yin sheng/Yifaxing/Sn(N)/SN340			2012/12/08		3RD ANGLE	