


ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1	AUGMENT FERRULE	2012/12/14	A2	Bzw
2				

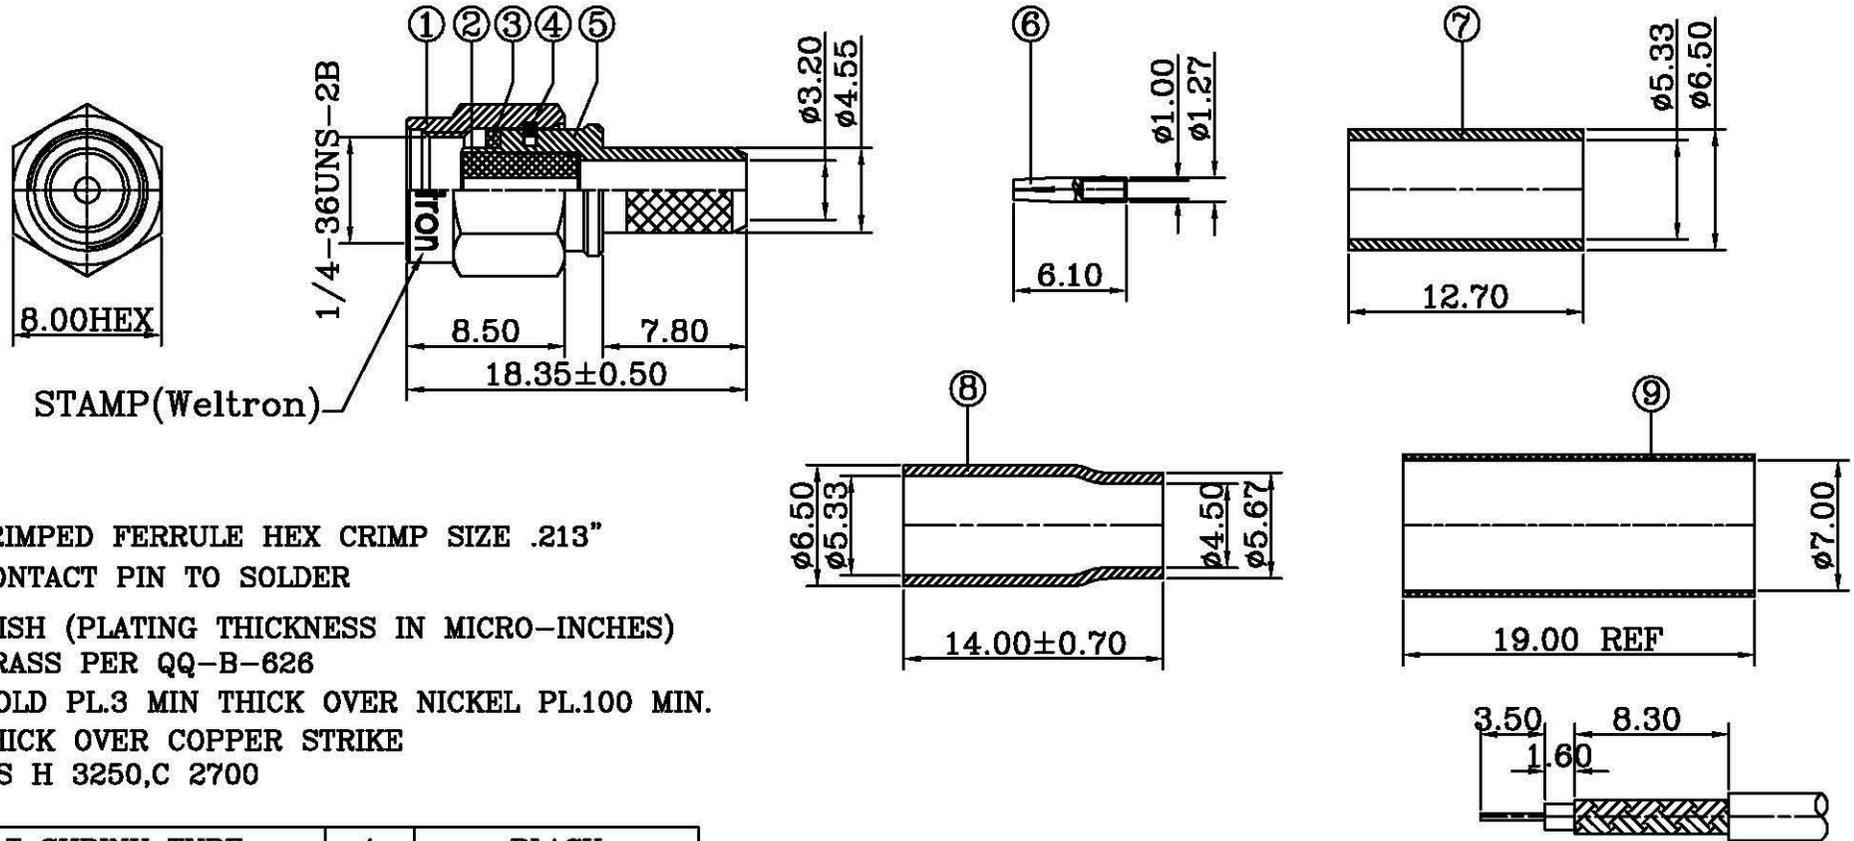

- 1.CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2.CONTACT PIN TO SOLDER

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1.BRASS PER QQ-B-626  
 2.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE  
 3.JIS H 3250,C 2700

RECOMMENDED  
CABLE STRIPPING DIM'S

9	HEAT SHRINK TUBE	1	BLACK	
8	FERRULE	NOTE 3	1	NOTE 2
7	FERRULE	NOTE 3	1	NOTE 2
6	CONTACT PIN	Be.copper	1	NOTE 2
5	BODY	NOTE 1	1	NOTE 2
4	RETAINER RING	Be.copper	1	NATURAL
3	GASKET	SILICON	1	RED
2	INSULATOR	TEFLON	1	NATURAL
1	NUT	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

44-900RP-58

# weltron®

TITLE  
RP SMA PLUG CRIMP, 50 OHM  
(FOR RG58,RG141,LMR195,RG58U-PLENUM CABLE)

DRAWING NO.	44-900RP-58	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES:	DESIGNED	Xwj
MODEL NO.	SSA1102-N-RP-B30TRD30-58	SCALE	FIT		0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	DRAWING
		EDITION	A1	ANGLES ±5°	CHECKED	David
					APPROVED	Andy
CAD FILE	Yin sheng/Yifaxing/SMA/SSA1102			PUBLISH DATE		3RD ANGLE