
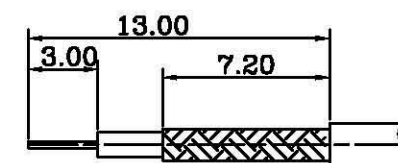
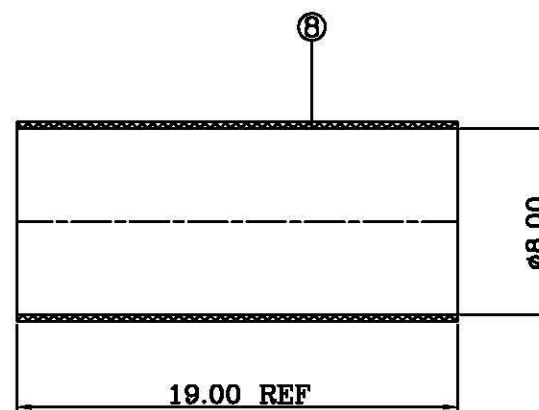
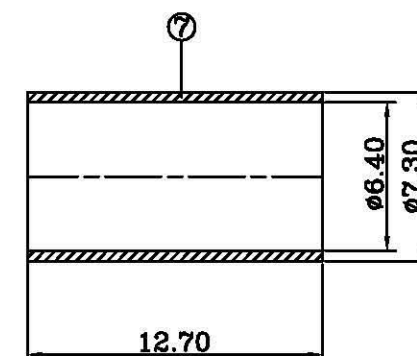



ROHS Compliant

# REVISIONS

RevNo	Description	Date	Revision	Mender
1	SUBSTITUTION CONTACT PIN	2013-1-8	A2	Bzw
2				

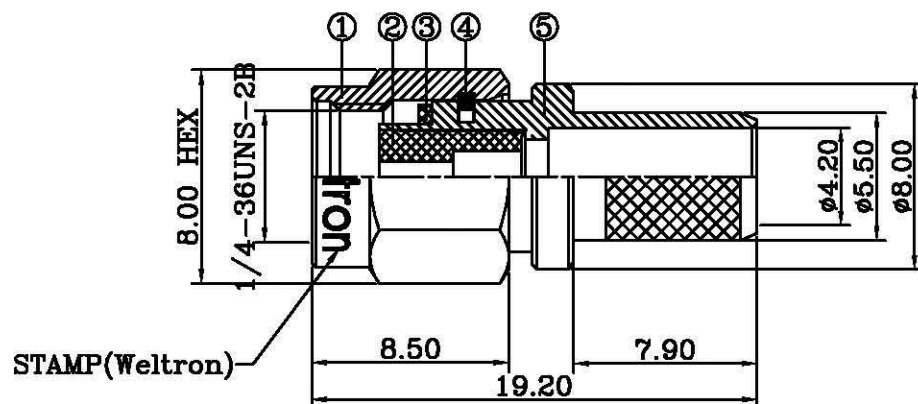

RECOMMENDED  
CABLE STRIPPING DIM'S

1.CRIMPED FERRULE HEX CRIMP SIZE .255"

2.CONTACT PIN TO SOLDER

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)  
GOLD PL. 3 MICROINCH MINIMUM

8	HEAT SHRINK TUBE	1	BLACK
7	FERRULE	BRASS	1 GOLD PLATED
6	CONTACT PIN	Be,Cu	1 GOLD PLATED
5	BODY	BRASS	1 GOLD PLATED
4	RETAINER RING	Be,Cu	1 NATURAL
3	GASKET	SILICON	1 RED
2	INSULATOR	TEFLON	1 WHITE
1	NUT	BRASS	1 GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY FINISHED

**weltron**®

PART NO.	44-900RP-8X	UNITS	MM	TITLE RP SMA PLUG CRIMP FOR RG8X CABLE,50 OHM	
MODEL NO.		SCALE	FIT		
		EDITION	A1	PUBLISH DATE	APPROVED
				2012/12/11	3RD ANGLE

UNLESS OTHERWISE SPECIFIED TOLERANCES:	DESIGNED	Bzw
0.5-15 = ±0.15	DRAWING	Bzw
15-30 = ±0.30	CHECKED	David
30-120 = ±0.60	APPROVED	Andy
>120 = ±1.00		

3RD ANGLE