




ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1				
2				

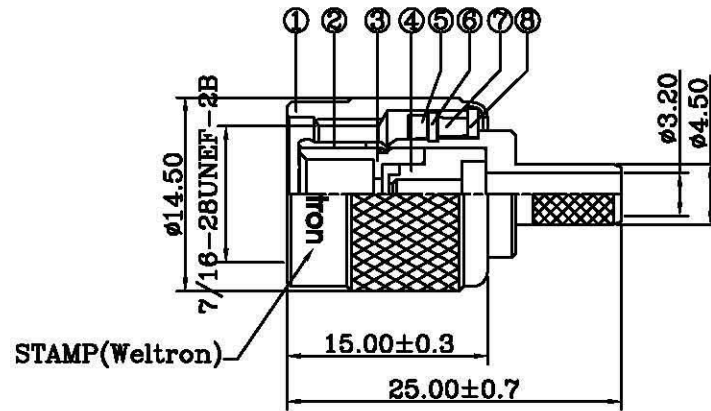

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.TEFLON MIL-P-19468
- 3.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 5.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
OR TO SOLDER



RECOMMENDED
CABLE STRIPPING DIM'S

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
10	FERRULE	NOTE 5	1	NOTE 3
9	CONTACT PIN	NOTE 1	1	NOTE 4
8	WASHER	IRON	1	NOTE 3
7	GASKET	POM	1	NATURAL
6	RETAINER RING	65Mn	1	NOTE 3
5	GASKET	RUBBER	1	RED
4	INSULATOR	NOTE 2	1	NATURAL
3	INSULATOR	NOTE 2	1	NATURAL
2	BODY	NOTE 1	1	NOTE 3
1	SHELL	NOTE 1	1	NOTE 3

weltron [®]				TITLE TNC CRIMP PLUG 50 OHMS FOR LMR200 CABLE		
PART NO.	44-270-LMR200	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.50 >120 = ±1.00	DESIGNED	Ckg
MODEL NO.		SCALE	FIT		ANGLES ±5°	DRAWING
DRAWING NO.		EDITION	A1	PUBLISH DATE	CHECKED	David
CAD FILE	Yin sheng/Yifaxing/ST/ST206			2012/12/10	APPROVED	Andy
					3RD ANGLE	