




ROHS Compliant

REVISIONS


RevNo	Description	Date	Revision	Mender
1				
2				

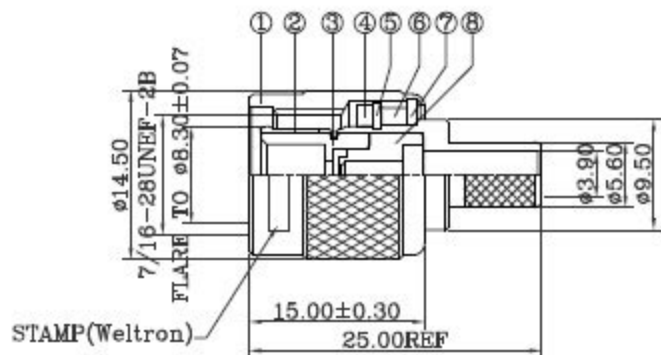


(RG59U, RG62U)




(RG59U-PLENUM)

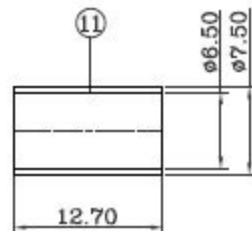

(RG59U, RG62U)

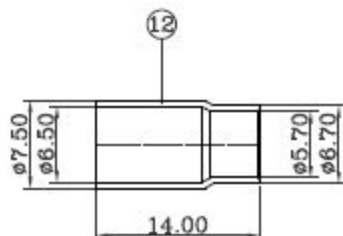

(RG59U-PLENUM)



RECOMMENDED
CABLE STRIPPING DIM'S

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- TEFLON MIL-P-19468
- JIS H 3250, C 2700

- CRIMPED FERRULE
HEX CRIMP SIZE .255"
- CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" OR TO SOLDER

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
12	FERRULE	NOTE 5	1	NOTE 2
11	FERRULE	NOTE 5	1	NOTE 2
10	CONTACT PIN	NOTE 1	1	NOTE 3
9	CONTACT PIN	NOTE 1	1	NOTE 3
8	INSULATOR	NOTE 4	1	NATURAL
7	WASHER	IRON	1	NOTE 2
6	GASKET	POM	1	NATURAL
5	RETAINER RING	65Mn	1	NOTE 2
4	GASKET	RUBBER	1	RED
3	INSULATOR	NOTE 4	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2

<h1 style="text-align: center;">Weltron®</h1>				TITLE		
				TNC MALE CRIMP FOR RG59, 62, BEL8221 CABLE		
PART NO.	44-270	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES:	DESIGNED	NQ
		SCALE	FIT			0.5-15 = ±0.15
MODEL NO.				15-30 = ±0.30	CHECKED	David
		EDITION	A1	30-120 = ±0.60	APPROVED	Andy
CAD FILE	Yin sheng/Yifaxing/ST/ST206			>120 = ±1.00		
				PUBLISH DATE		
				2010/10/26		
						3RD ANGLE