
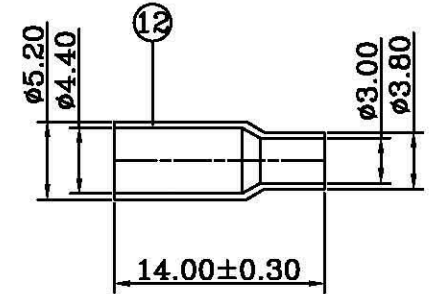




ROHS Compliant


REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

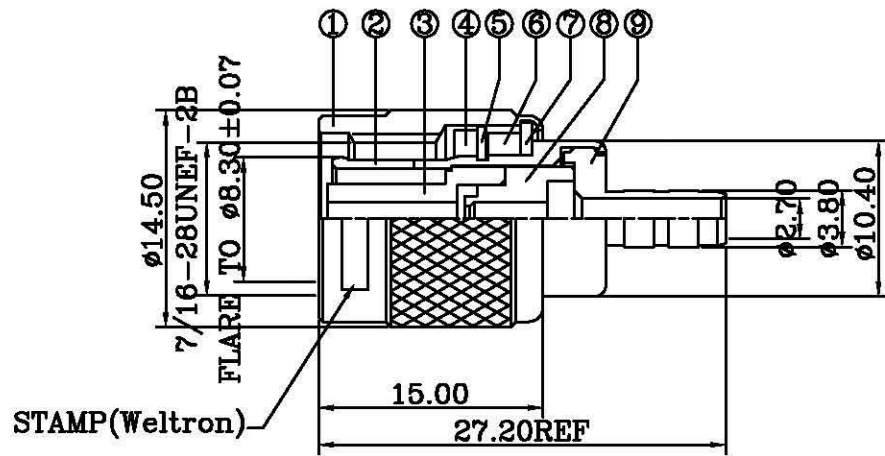

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.JIS H 3250,C 2700

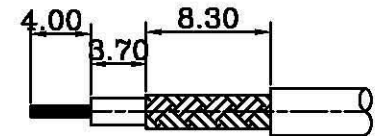

RECOMMENDED CABLE STRIPPING DIM'S

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
OR TO SOLDER

12	FERRULE	NOTE 4	1	NOTE 2
11	SLEEVE	POM	1	NATURAL
10	CONTACT PIN	NOTE 1	1	NOTE 3
9	REAR BODY	NOTE 1	1	NOTE 2
8	INSULATOR	TEFLON	1	NATURAL
7	WASHER	IRON	1	NOTE 2
6	GASKET	POM	1	NATURAL
5	RETAINER RING	65Mn	1	NOTE 2
4	GASKET	RUBBER	1	RED
3	INSULATOR	TEFLON	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron [®]				TITLE TNC REVERSE POLARITY CRIMP PLUG 50 OHMS (FOR RG174U, RG316U CABLE)			
				PART NO. 44-270RP-174		UNITS	MM
MODEL NO.		SCALE	FIT	0.5-15 = ±0.15	ANGLES	DESIGNED	NQ
		EDITION	A1	15-30 = ±0.30	±5°	DRAWING	NQ
CAD FILE		Yin sheng/Yifaxing/ST/ST230		30-120 = ±0.80		CHECKED	David
				>120 = ±1.00		APPROVED	Andy
				PUBLISH DATE		APR 30 2010	
				2009/12/31		3RD ANGLE	