




ROHS Compliant


REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

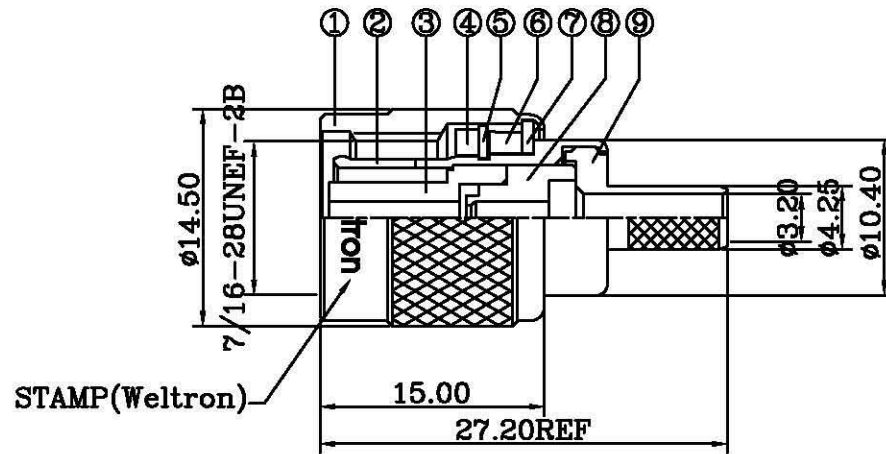

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.TEFLON MIL-P-19468
- 3.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 4.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 5.JIS H 3250,C 2700

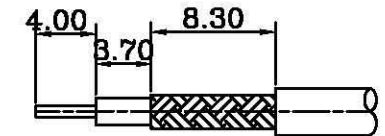

RECOMMENDED CABLE STRIPPING DIM'S

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
OR TO SOLDER

11	FERRULE	NOTE 5	1	NOTE 3
10	CONTACT PIN	NOTE 1	1	NOTE 4
9	REAR BODY	NOTE 1	1	NOTE 3
8	INSULATOR	NOTE 2	1	WHITE
7	WASHER	IRON	1	NOTE 3
6	GASKET	POM	1	WHITE
5	RETAINER RING	65Mn	1	NOTE 3
4	GASKET	RUBBER	1	RED
3	INSULATOR	NOTE 2	1	WHITE
2	BODY	NOTE 1	1	NOTE 3
1	SHELL	NOTE 1	1	NOTE 3
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

weltron [®]				TITLE TNC REVERSE POLARITY CRIMP PLUG 50 OHMS FOR RG223U, RG55U, RG142U CABLE			
				PART NO. 44-270RP-223		UNITS	MM
MODEL NO.		SCALE	FIT	DRAWING	Ckg		
		EDITION	A1	PUBLISH DATE	2012/12/10	CHECKED	David
CAD FILE		Yin sheng/Yifaxing/ST/ST230		APPROVED	Andy	3RD ANGLE	