

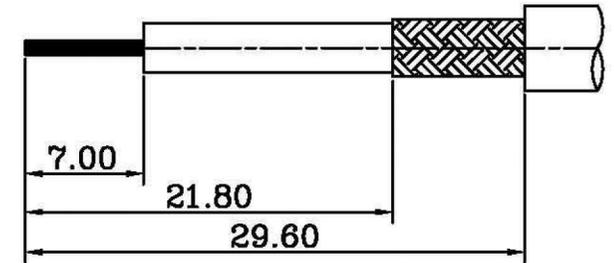
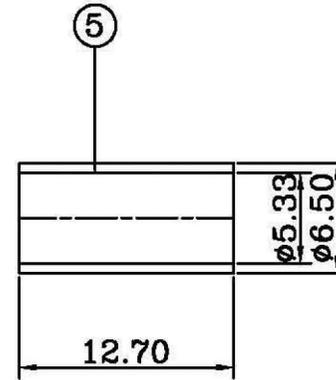


ROHS Compliant

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	Augment ferrule	2012/12/19	A2	NQ
2				

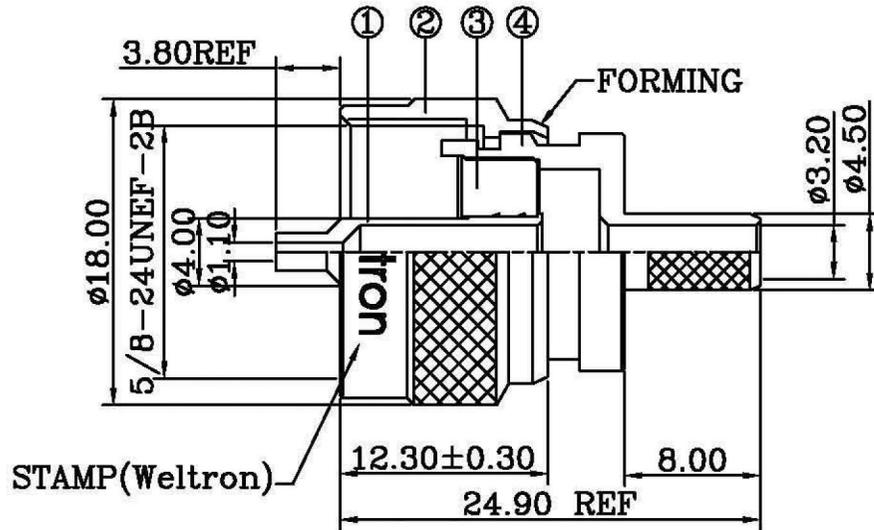

RECOMMENDED  
CABLE STRIPPING DIM'S

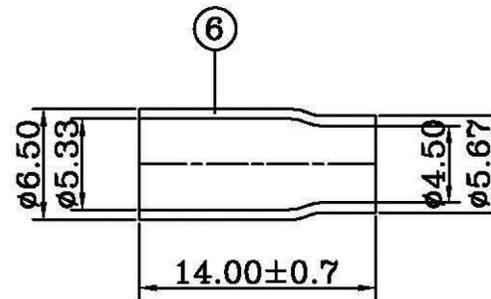

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL.80 MIN. THICK OVER COPPER STRIKE
  3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. JIS H 3250, C 2700

6	FERRULE	NOTE 5	1	NOTE 2
5	FERRULE	NOTE 5	1	NOTE 2
4	BODY	NOTE 1	1	NOTE 2
3	INSULATOR	NOTE 4	1	NATURAL
2	SHELL	NOTE 1	1	NOTE 2
1	CONTACT PIN	NOTE 1	1	NOTE 3
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

<b>weltron</b> ®				TITLE UHF MALE CRIMP, 50 OHM (FOR RG58, RG58A, BNC141, LMR106, RG50U-PLENUM, BELDEN 9219 CABLE)			
PART NO.	44-304C-58	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES:	DESIGNED	NQ	
		SCALE	FIT			DRAWING	NQ
MODEL NO.				0.5-15 = ±0.15	ANGLES	CHECKED	David
				15-30 = ±0.30	±5°		APPROVED
		EDITION	A1	PUBLISH DATE			
				2010/10/27			3RD ANGLE