


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	DRAWN
	A		02/28/07	JONES
	B		01/18/08	Allan

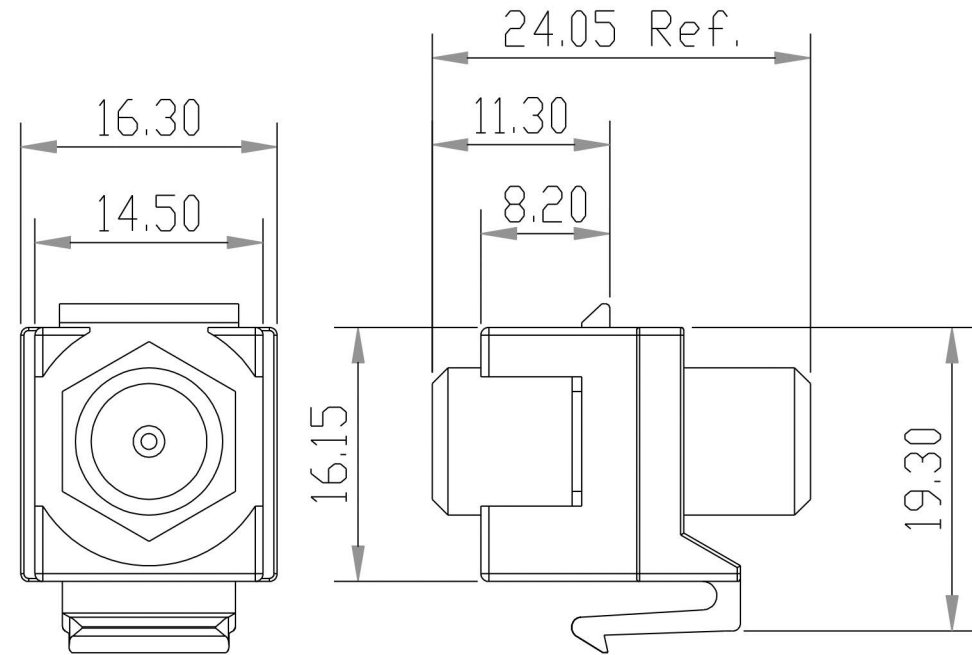

## NOTES:

## MATERIAL:

1. SHELL: Bronze, Nickel Plating.
2. Terminal: Bronze, Tin Plating.
3. INSULATOR: PE
4. NUT: Iron Plated With Nickel Over Copper.
5. PLASTIC MATERIAL: ABS 94V-0.

## GENERAL SPECIFICATIONS:

1. Working Voltage: 250VDC
2. Test Voltage: 750VDC 1Minute
3. Feed Through Current: MAX 10A
4. Insulation Resistance: 10 Mohm min.
5. Capacitance: 2x1.5nF min.
6. Inductance: 500nF min.
7. 1GHz Bandwidth with Low Characteristics

## ENVIRONMENTS:

1. TEMPERATURE: -40°C to 65°C
2. RELATIVE HUMIDITY: 0% to 93%

UNLESS OTHERWISE SPECIFIED: TOLERANCES			PROJECT ID		<b>Weltron</b> <sup>®</sup>
INCH	MM	ANGULAR	2013-AF	FILE	
.X ± .016	.X ± 0.2	X ± 1°		Z2309.DWG	DATE
.XX ± .008	.XX ± 0.1	.X ± .5°			
.XXX ± .004					
MATERIAL			DRAWN		TITLE
SURFACE			CHECK		F TYPE COUPLER, FEMALE-FEMALE INSERT W/HEX FEED THROUGH CATV MODULE
FINISH			APPROVED		SIZE
					DRAWING NUMBER
					PART NUMBER
					REV
					B
					SCALE
					None
					UNIT
					mm
					SHEET
					1 OF 1