

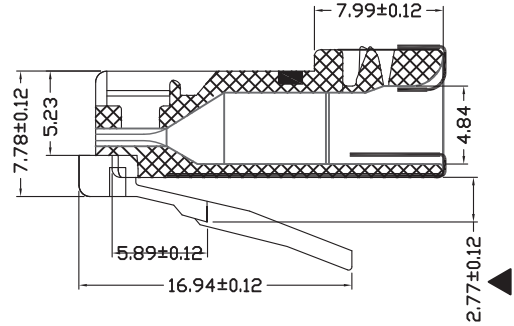



記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

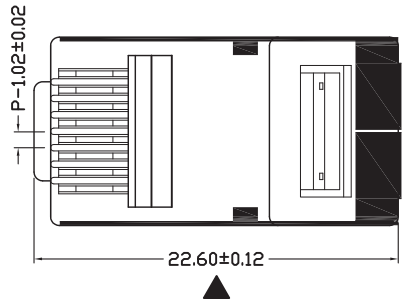

FEATURES:

- 1 Electrical Test:
  - A. Safety Voltage/Current Rating 150V ac, at 1.5A.
  - B. Dielectric with standing 1000V/DC/min, <0.5A.
  - C. Insulation Resistance: >500MΩ, 1000V./min
  - D. Contact Resistance: <20MΩ
- 2 Mechanical:
  - A. Cable-to-Plug tensile strength-20LBs (89N) min.
  - B. Durability: 750 mating cycles.
- 3 Operation Temperature: -40°C ~ +85°C.
- 4. Environmental compliance
  - A. the products are compliant with the RoHS, and REACH ETC.
- 5. Safety standards: UL

BLADE:	202	304	309	311	314			<input type="checkbox"/> Shell	<input type="checkbox"/> Brass	<input type="checkbox"/> Spcc	1
Drawing								Au: <input type="checkbox"/> G/F" <input type="checkbox"/> 1u"	<input type="checkbox"/> 3u" <input type="checkbox"/> Ni	<input type="checkbox"/> 80u"	
Mark								PC	<input type="checkbox"/> 94-V0	<input checked="" type="checkbox"/> 94-V2	1
BLADE:	203/204	209/210	307/308	312/313				Contacts	<input checked="" type="checkbox"/> Brass	<input type="checkbox"/> Phosphor copper	8
Drawing								<input type="checkbox"/> G/F" <input type="checkbox"/> 1u"	<input type="checkbox"/> 3u" <input type="checkbox"/> 6u"		
Mark								<input type="checkbox"/> 15u" <input type="checkbox"/> 30u"	<input type="checkbox"/> 50u" <input type="checkbox"/> OTHER		

DESCRIPTION	Category 6 Shielded Pass Through RJ45			SHEET	1/1			
PRODUCT NO	44-751-8C6SH-Z		UNIT	mm	SCALE	1:1	EDITI	A/0
DIMENSION IN mm (Inch)		THIRD ANGLE PROJECTION		DRAWN	DATE	2020.02.26		
TOLERANCE UNLESS OTHERWISE SPECIFIED				CHECK	DATE	2020.02.26		
x.x ±0.2	ANGLES			APPRO	DATE	2020.02.26		
x.xx ±0.10	.X° ±0°							
x.xxx ±0.050	.X° ±0.0°							