

C5e PATCH PANEL UTP 50u

Performance:
Meets C5e EIA/TIA 568B Standard.


Materials:

Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
Jack : 8P8C 50 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Cap : Fireproof ABS UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps .
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

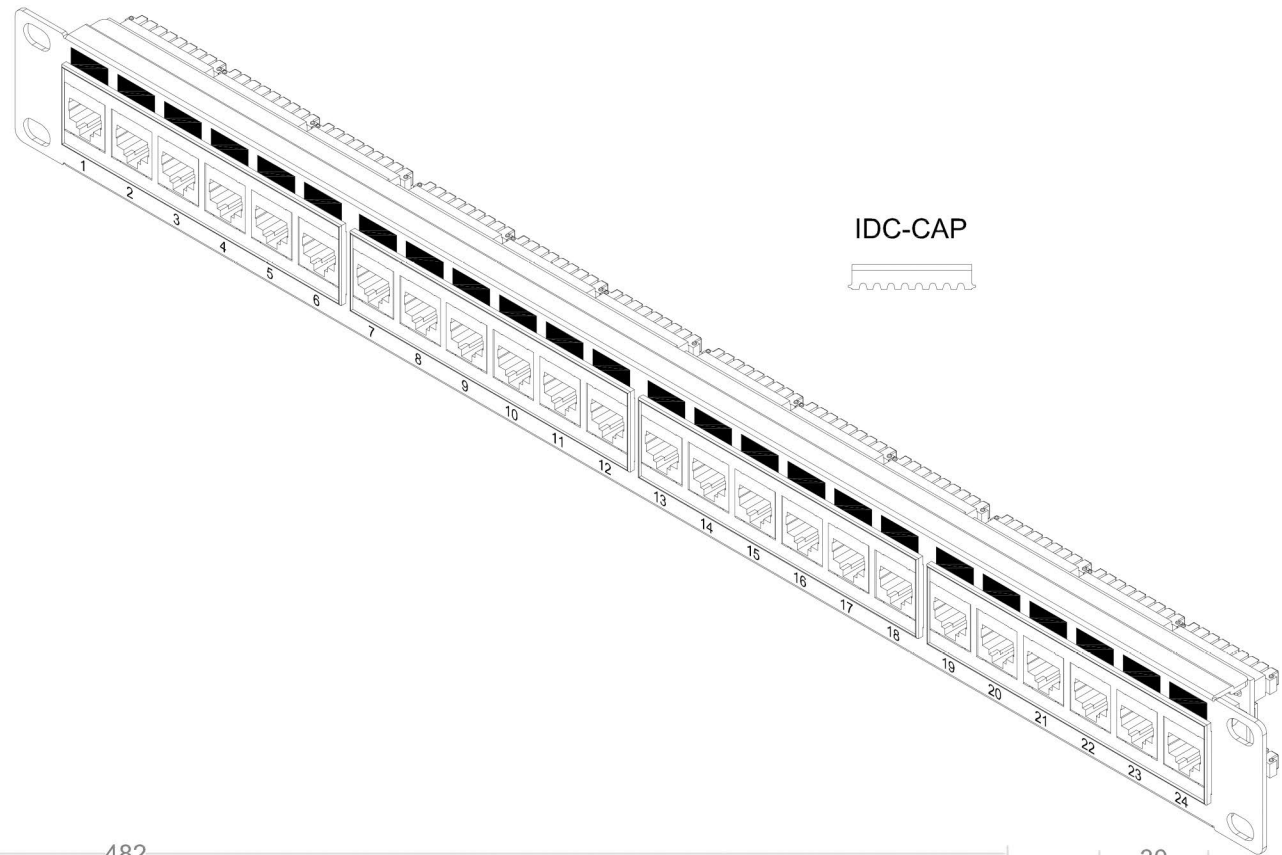

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	90-24PPC5E
	APPR	DESCRIPTION	24 PORT 568 A/B 110 TYPE CAT5E PATCH PANEL 1RU
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15

weltron®

C5e PATCH PANEL UTP 50u

Performance:
Meets C5e EIA/TIA 568B Standard.


Materials:

Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
Jack : 8P8C 50 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Cap : Fireproof ABS UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps .
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

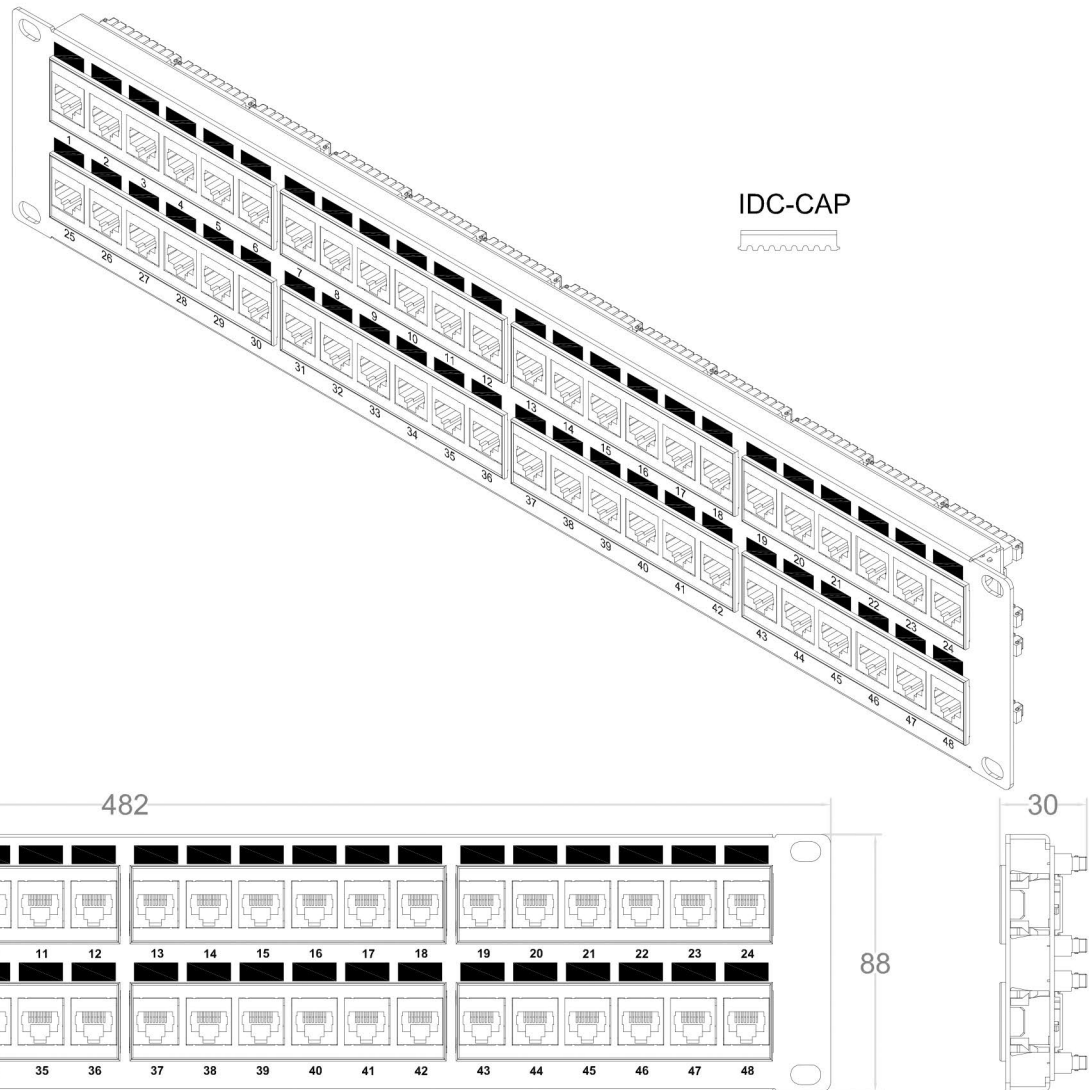

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	90-48PPC5E
	APPR	CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15

weltron®