
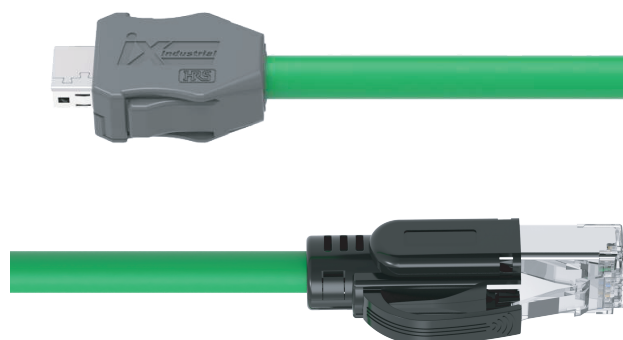


Overview

- ix Male A TYPE to RJ45 Male PUR Cable
- Head A: IP20; Head B: IP20
- Cable: SF/UTP 4*[26AWG(30/0.08±0.008BC)+Non-woven fabric]+PP PORE*5+AL/MYLAR+BRAID(16*9/0.10TC)+Non-woven fabric OD:Ø6.8±0.2MM PUR JACKET.

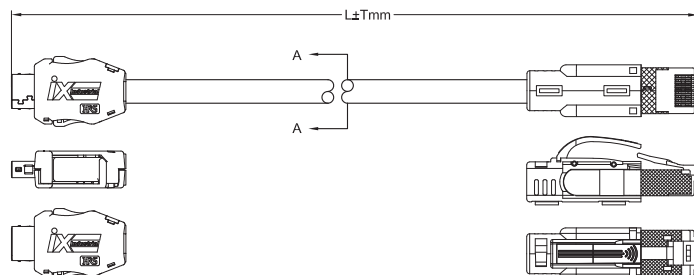

Technical data

Side A

Head A: Connection	ix
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	10P10C
Head A: LED	No
Head A:Plating Thickness	G/F
Head A:Housing Color	Black
Head A:Shell Material	Stainless steel

Side B

Head B: Connection	RJ45
Head B: Angle cable outlet	0°
Head B: Gender	Male
Head B: Coding	/
Head B: No. of poles	8
Head B: LED	No
Head B: Body color	Black
Connector Material	PC
Contact Material	Copper Alloy,50U" Gold Plating
Shell plating	Nickel

Electrical data

Operating voltage	max.60V DC
Nominal voltage	300 V
Contact resistance	max. 30 mΩ
Current rating	1.5 A

Mechanical data

Head A: Degree of protection	IP20
Head B: Degree of protection	IP20
Bending radius (mobile)	min.15 x outer diameter
Bending radius (fixed)	min.10 x outer diameter
Torsion Supported	

Environmental conditions

Temperature range (mobile)	-25°C+70°C
Temperature range (fixed)	-25°C+80°C
Cable: Temperature range (fixed)	-40°C+80°C
Dragchain capable	Yes
Head A: Mating cycles	min5000
Head A: Flame resistance	HB (UL 94V-0)
Head A: Insertion and unplugging force	25N
Cable: Silicone-free	Yes

Cables

Cable length	0~20m
Length tolerance	±20/±80mm
Shielded	Yes
Conductor structure	30x0.08mm
AWG	26
External sheath: Material	PUR
External sheath: Color	Green
Cable diameter	6.8±0.2mm
Wire cross section	36.3mm²

Technical data

Side A





Technical drawing

Coding

Side B

Technical drawing

Coding



Connection diagram

P1	P2
1	1 WHITE/ORANGE
2	2 ORANGE
4	4 BLUE
5	5 WHITE/BLUE
6	3 WHITE/GREEN
7	6 GREEN
9	7 WHITE/BROWN
10	8 BROWN
S	S SHIELDED

Sectional view

