
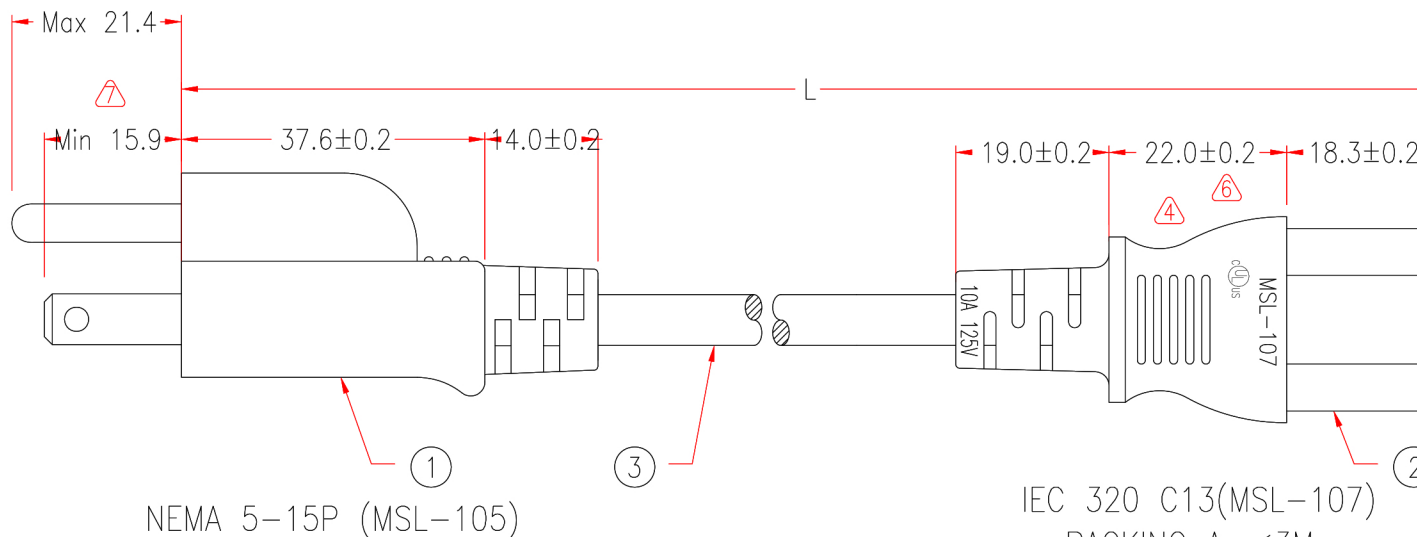



PACKING B: >3M



P1,P2: cULus

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS PROTRUDING LETTERING MOULD

CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978 CSA
SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

P1	P2
BLACK L	L
WHITE N	N
GREEN E	E

3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-099	H5TB10-0304K09	L-30mm	M304	
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: CP-R445A-BS	A1QC61-0767	1	M767	
	TERMINAL: 2*4mm, 98744BS-0/A	A1QB24-0257	3	M257	
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-002	A1QC07-0767	1	M767	
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257	
	TERMINAL: ø4.75, 98475BS-1	A1QB06-0257	1	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED

CHECKED

DRAWING

Cable Length Unless Other Spec. ⑧	
Tolerances:	
0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm
UNIT: mm	

REV.7 2018.04.18	MODIFY P1 MOLDED SIZE	REV.8 2019.07.11	MODIFY TOLERANCE LENGTH
REV.5 2017.06.06	MODIFY MSL-107 MOLDED SIZE	REV.6 2017.07.20	MODIFY CABLE & MOLDED GOLO
REV.3 2009.10.22	MODIFY MODEL	REV.4 2015.01.09	MODIFY MODEL LOGO
REV.1 2009.09.04	MODIFY LABEL	REV.2 2009.09.10	MODIFY CABLE MARKING