
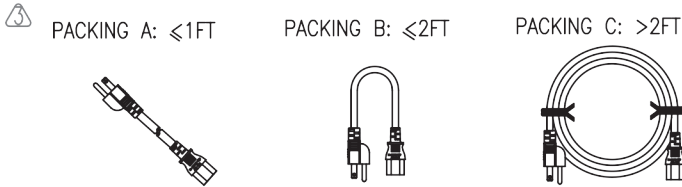


P2: M-084A

P2: M-005B

Customer No.: No.1

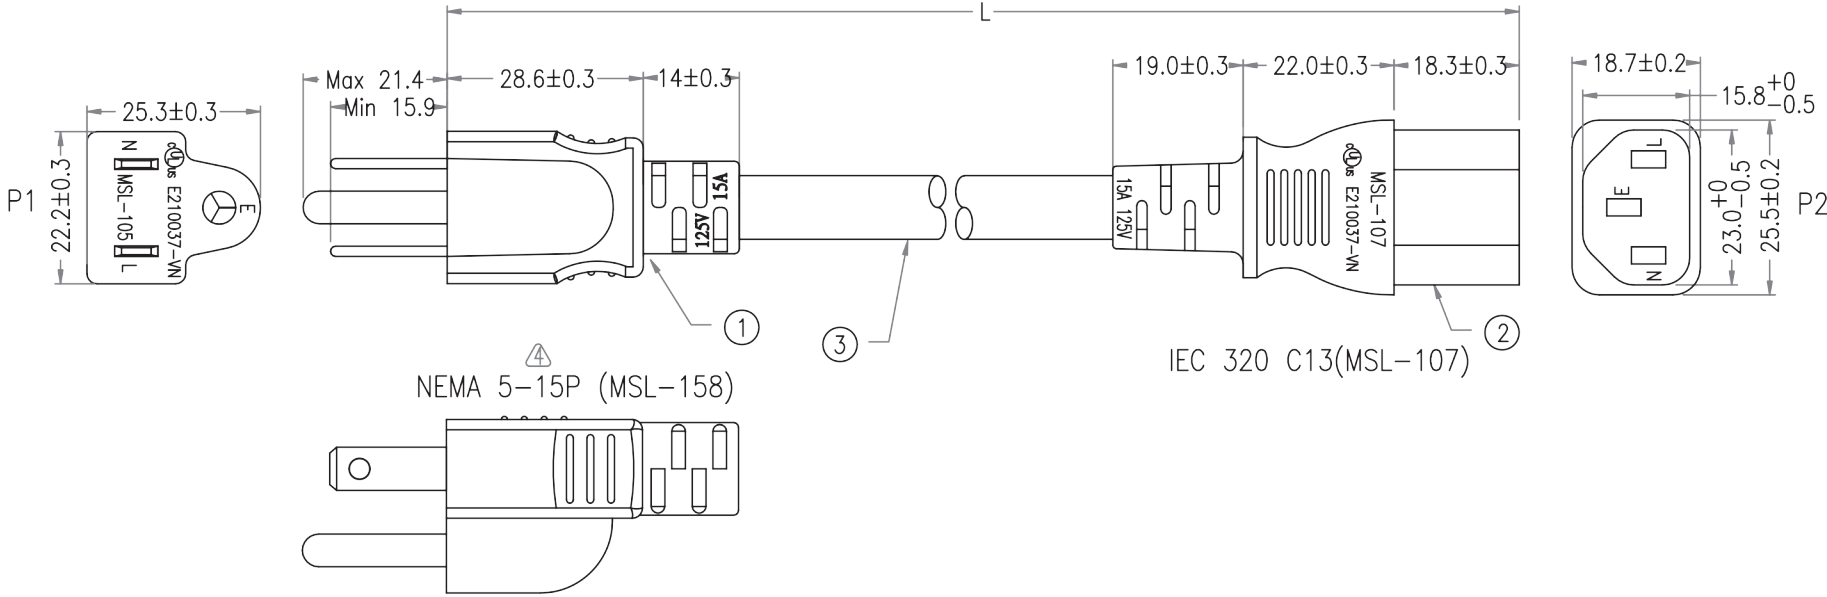

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978 C(UL)
SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V E204978 MSL-VN-

107158B2F14A(FP365-00)					
P1			P2		
BLACK	L	_____	L		
WHITE	N	_____	N		
GREEN	E	_____	E		

P1,P2: cULus E210037-VN
NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS PROTRUDING LETTERING MOULD

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-147		H5TC21-0304K09	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK		H1BC02-0304K09		M304
	BRACKET: YS-003		A1QC14-0767	1	M767
	TERMINAL: 2*4mm, 98744L		A1QB42-0257	3	M257
1	MOLDED PVC 35P, COLOR BLACK		H1BC02-0304K09		M304
	TERMINAL WITH BRACKET: LP-31M内架-9		A1QC82-1035K09	1	M1035
No.	DESCRIPTION			Q'TY	Supplier
APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU				
DESIGNER	XJW				
DRAWING	MuMu				
DATE	12/JUL/24	ITEM NO.	AC-110-15A2-XXBK		UNIT:mm

REV.3 2023.03.01 MODIFY PACKING REV.4 2024.07.12 MODIFY P1 PLUG MODEL AND BRACKET SUPPLIER

REV.1 2021.11.09 MODIFY PLUG DESCRIPTION REV.2 2022.07.01 MODIFY TERMINAL

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm