weltron®

SW-1402-500-DB

DIRECT BURIAL AUDIO CABLE
14 AWG / 2 Conductor

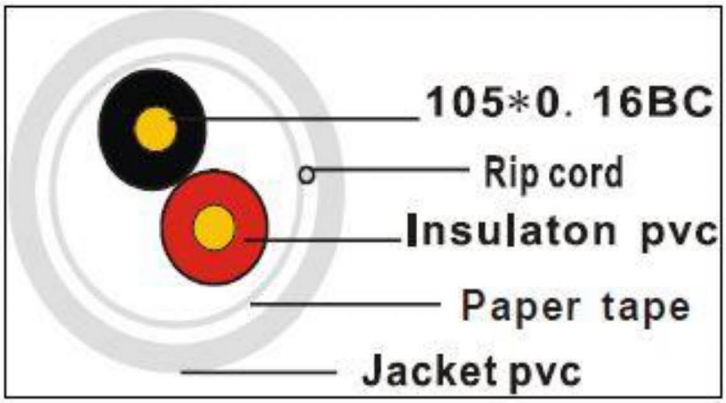

Description

14/2 Stranded CMR/CL3R Direct Burial Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 2 Oxygen Free Bare Copper Conductors in an Overall Jacket

Physical Characteristics

Conductor		**Oxygen Free B.C.**
Number of Conductors		2
AWG		14
Stranding		105
Diameter	(inches)	0.0063
Insulation		**PVC**
Diameter	(inches)	0.1023
Nominal Wall	(inches)	0.0102
Jacket		**FR-PVC**
Overall Diameter	(inches)	0.2559
Nominal Thickness	(inches)	0.0196
Paper Tape		**Yes**
Rip Cord		**Yes**
Conductor Resistance	(ohms / 1000m)	**10**
Voltage	(volts)	**300**
Nominal Weight	(pounds)	**27**

Colors

Insulation Colors	**Black / Red**

Part Numbers

Part Number	Color		Put-up
SW-1402-500-DB	**Black**	**500'**	**Reelex II**

Cable Marking

AUDIO CABLE 2 COND 14 AWG HI-STRAND OXYGEN FREE COPPER CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US ***FT