


PIN OUT:

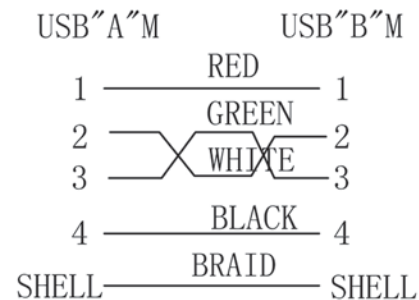

BOM LIST

No.	Material Name	SPEC	Unit	QTY	Remark
①	Cable	UL2725 1P*28#+2C*24#+AL+D+B Black Jacket 48AL OD:4.5 Printing:USB SHIELDED HIGH SPEED CABLE 2.0 REVISION 28AWG/1P+24AWG/2C(1") E318233 ㊄ AWM 2725 80°C 30V			
②	Connector	USB 2.0 MALE WHITE INNER, Iron shell plated nickel RoHS	pcs	1	
③	Connector	USB 2.0 B MALE WHITE INNER, Iron shell plated nickel RoHS	pcs	1	
④	Tin line	Lead-free green tin line ODO.8 1000G RoHS	g	0.14	
⑤	Tube	Black tube ODO.8 RoHS	m	0.008	1*8mm
⑥	Outer mold	Black PVC A813 45P RoHS	kg	0.014	
⑦	Tie	Black wire RoHS			
⑧	PE bag	Size:220*180*0.1MM RoHS	pcs	1	
⑨	PE bag-Label	Size:70*40mm RoHS	pcs	1	
⑩	PE bag	Size:05*30*30fc(0.005*76.2*76.2CM) RoHS			
⑪	Outer carton	K=K 46*30*30CM RoHS			

Mold detail:USB:A♂:A-1383 USB:B♂:A-1381

Test parameters: insulation resistance:5MΩ conduction impedance: 5MΩ

Note:

# weltron®

	SCALE	UNIT	Ver	Part No: <b>90-USB-AB-XX</b>
	NO.	MM.	A/2	
CUS ET267	Item USB"A"♂/"B"♂			Approval:
Drawing No. DJSET2671708009	Date 2017-8-22			Customer audit: