


ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE:3 OHM MAX
3. INSULATION RESISTANCE:5M OHM MIN
4. HI-POT TEST:DC 300V/10ms
5. Data requirements:1Gbps:5V/1A(5W)

PIN ASSLGMENT:

P1	Cable	P2
1	RD	A4, B4, A9, B9 (Vbus)
2	WH	A7 (DNI)
3	GR	A6 (DPI)
5	BK	A1, B1, A12, B12 (GND)

NO.	Description	Q' TY	Unit
5	Cable:28+24AWG/φ4.2/BK	1	PCS
4	45P Black PVC	12	g
3	LDPE	8	g
2	USB Type C Male/NI	1	PCS
1	USB MICRO B Male/NI	1	PCS

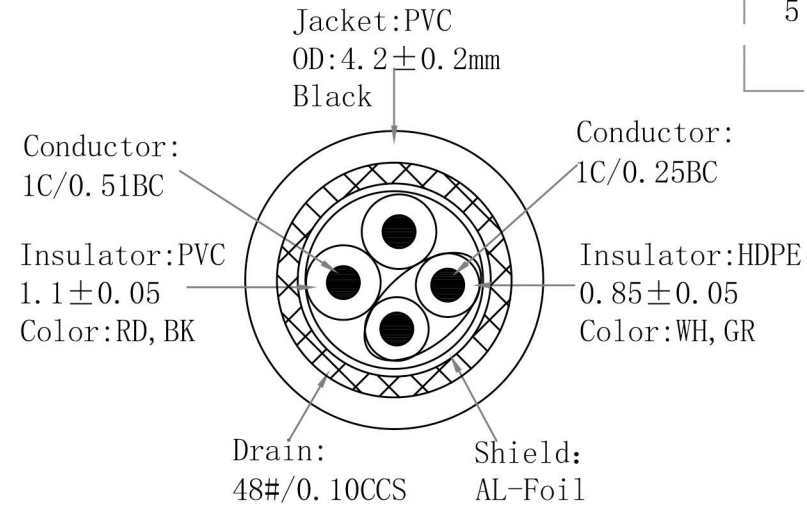

PROJECTION	TOLERANCE	DESIGNED	HZM	PART NO. :	90-USB-CMICB2-1M	SCALE
	0 --5 ±0.2	CHECKAGE				FREE
UNITS mm	5 --30±0.3	APPROVAL		DESCRIPTION	USB 3.1 C TO 2.0 MICRO B 0.5GB	SHEET
MODEL A4	30--50±0.4	DATE	2020-01-16	DWG NO.	WLD-TZ2001010	1/1
	ANGLE ±3°					