


P1: M-1532A

P2: M-783B

Customer No.: No. 1

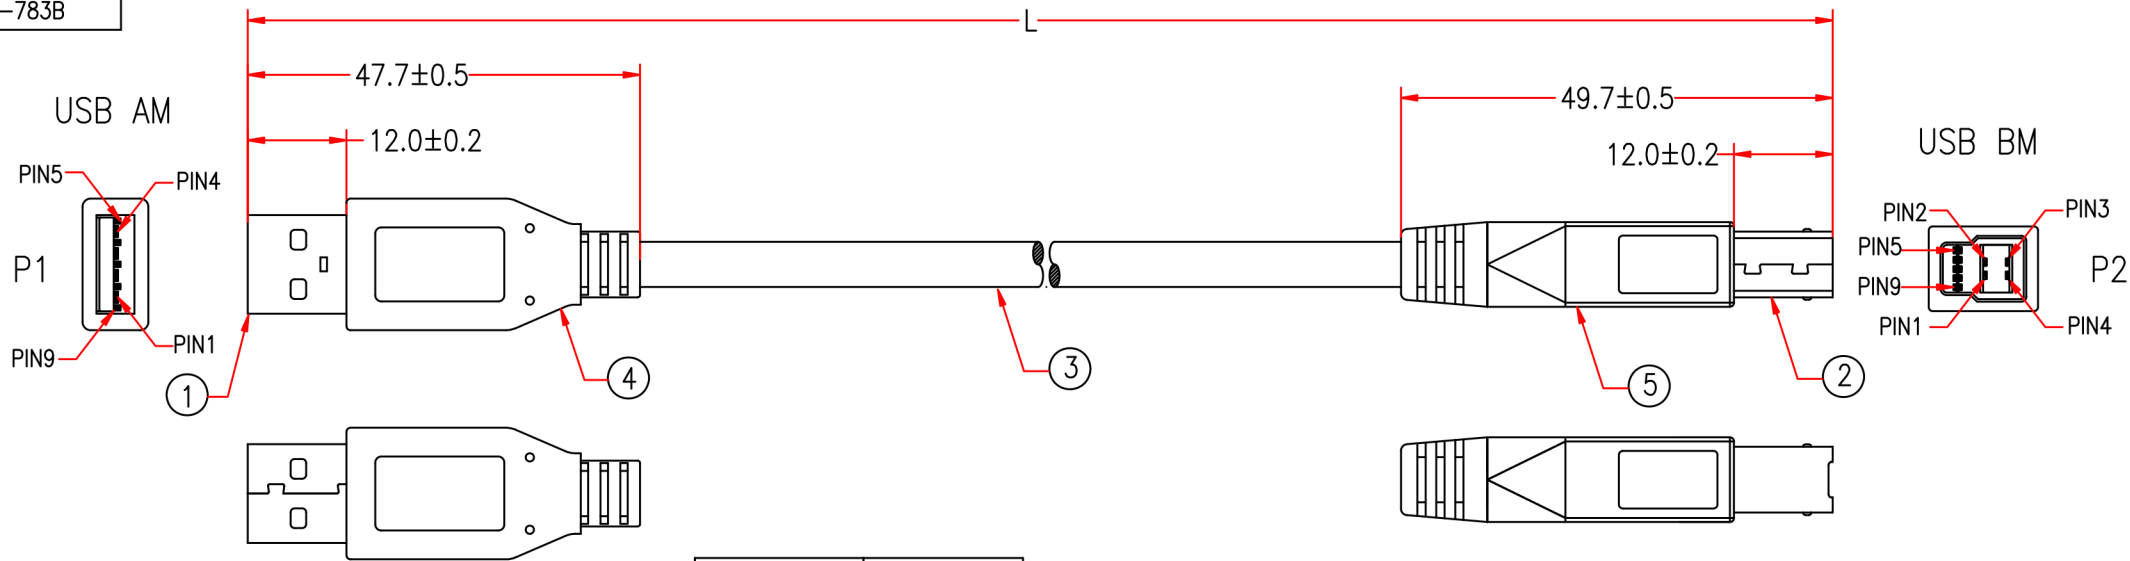


ITEM NO.	LENGTH(L)
10U3-32203-BK	3FT (915mm)
10U3-32206-BK	6FT (1830mm)
10U3-32210-BK	10FT (3048mm)
10U3-32215-BK	15FT (4572mm)

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE ϕ 1.0*4mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 2.0*8mm	A4HA09-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	BLACK HEAT SHRINK TUBE ϕ 1.0*4mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 2.0*8mm	A4HA09-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS +24AWG*2C+AMA BRAID(85%), OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333	H5KS02-0304K09	L-20mm	M304
2	USB B MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HB52-0454	1set	M454
1	USB A MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HA48-0454	1set	M454

9147-11	
P1	P2
1	1 RED
2	2 WHITE
3	3 GREEN
4	4 BLACK
5	5 BLUE
6	6 YELLOW
7	7 SHIELD
8	8 PURPLE
9	9 ORANGE
7	7 SHIELD
SHIELD	SHIELD

No.	DESCRIPTION		Q'TY	Supplier
APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DESIGNER	JIANG			
DRAWING	ZHU			
DATE	30/OCT/20	ITEM NO.	90-USBAB-3.0-XX	
		UNIT:mm	