


PIN ASSIGNMENT:

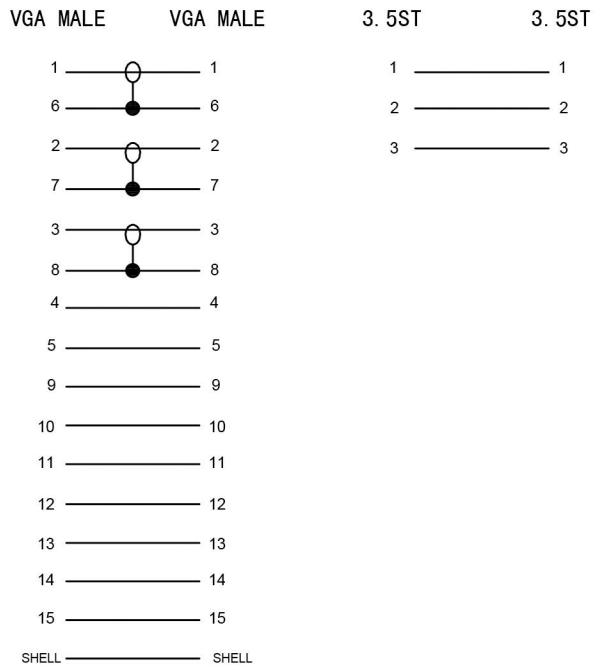

ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MISS WIRE TEST.
- <2>.INSULATION RESISTANCE:DC 300V 5Mohm MIN.
- <3>.CONDUCTOR RESISTANCE: 10 ohm MAX

⑦	OUTER MOLDED	45P BLACK PVC		
⑥	INTER MOLDED	PE		
⑤	SCREW	SCREW 2. 3*37 #4-40 , NICKEL PLATED	4PCS	
④	CONN	3.5 MALE NICKEL PLATED	2PCS	
③	CONN	VGA MALE Solid Pin NICKEL PLATED	2PCS	
②	CABLE	(7/0. 12*TC/PVC1. 0MM)*3C+AL OD: 3.5MM BLACK PVC	0. 61M	
①	CABLE	(7/0. 10TC/FPE1. 6+7/0. 11TC+AL)*3COAX+ 7/0. 10TC/PVC0. 6*12C+AL+1/0. 254CCS+80#/0. 12ALB OD: 6.5MM CL2, BLACK PVC		
NO.	SPECIFICATION STANDARD		QTY	REMARK

SCALE	1:1
UNIT	mm



TITLE: SVGA + 3.5MM STEREO CABLE
DWG NO

DESIGN	Song	CHECKED	APPROVED
REV	A1	DATE	2016-06-17
		PAGE:1/1	