



RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	2013.10.19

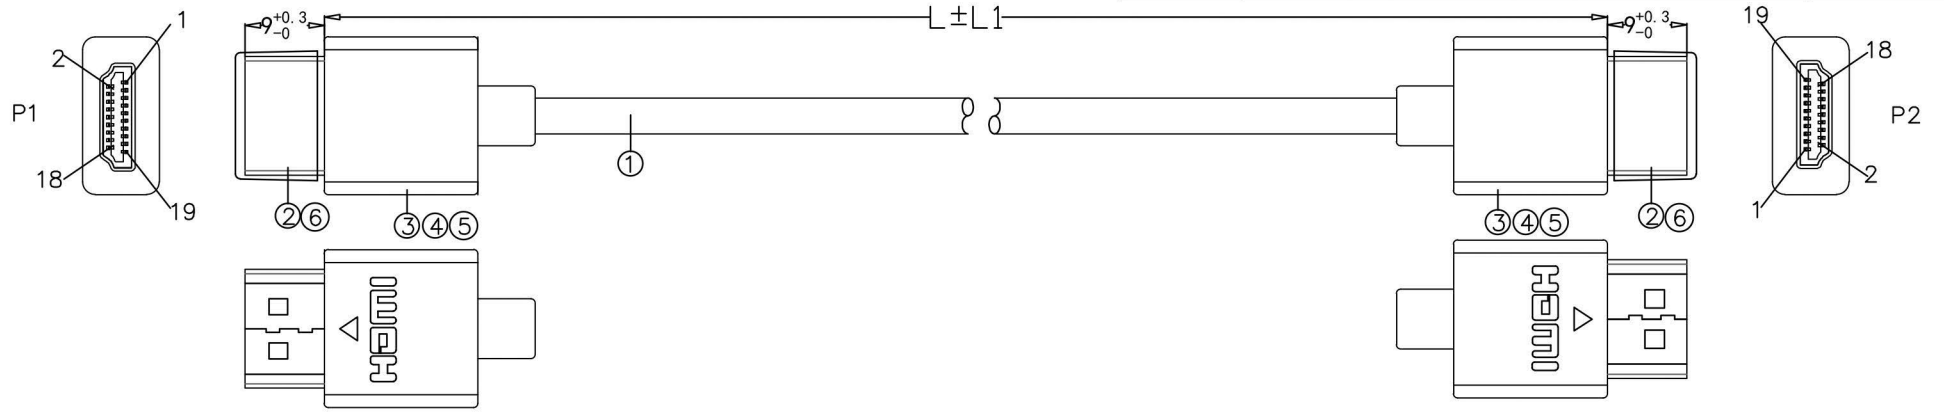

ELECTRONIC TEST:

- A. OPEN/SHORT/INTERMITTENCE: 100%.
- B. HI-POT: 300V/AC 0.01S
- C. INSULATION RESISTANCE: 300V/DC,0.01S 10M OHM (MIN)
- D. CONDUCTIVE RESISTANCE:5 OHM MAX

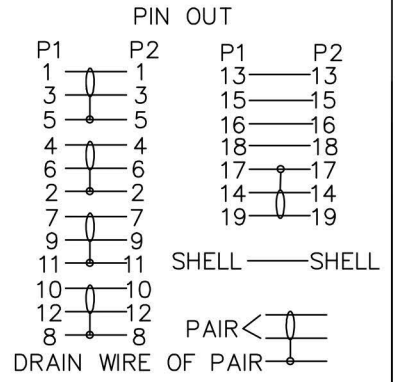

NO	NAME	SPECIFICATIONS	Q'TY	UNIT
⑥		HDMI A LDPEI	2	PCS
⑤		∅1.0*13 HEAT SHRINK TUBE	2	PCS
④		45P PVC	9.8	G
③		LDPE	2	G
②		P1&P2:HDMI A 19PIN MALE: +1.4V#36	2	PCS
①		UL20379{ (7/0.05TC) *1P+D(1/0.16)}*5C+ (7/0.05TC) *4C+AL+ B(16 /5/0.12TC) ∅3.6±0.2MM	L	MM

PROJ:	TOLERANCE: XX= XXX=	Part No. - 91-804LP-XX
SCALE: NONE	REV: A	
UNIT: MM	SHEET: 1/2	

weltron®