



RG6 COAXIAL CABLE

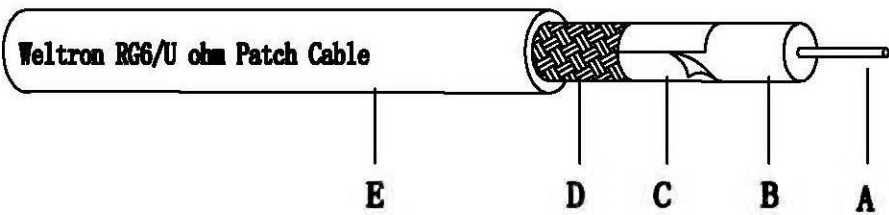

Construction Specification		
Item	Material	Diameter
A. Inner conductor	CCS	1.02mm
B. Dielectric	FPE	4.7±0.2mm
C. First shield	aluminum foil (AL/P)	4.8±0.2mm
D Outer conductor	ALMG braid	64±0.12mm
E. Jacket	PVC (Black)	7.0±0.2mm

NO.	PARTS NAME	SPECIFICATION STANDARD	QTY
2	CABLE	RG6 COAXIAL CABLE Black	72"
1	CONNECTORS	F Plug Nickel plating	2set

WIRING DIAGRAM



1. dimensions As shown
2. insulation resistance ≥ 10Q up to 500V=
3. dielectric strength
1 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

01	NEW ISSUE	2016. 03. 17
REV.	MODIFY DESCRIPTION	DATE

		P/N WF-72-6/U		ENG. DATE
SCALE NONE SHEET 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X ± .XX ± .XX ± ANGLES ± REV. 00 CUS. REV		TITLE F PLUG TO F PLUG CABLE		CHECKED DATE
				APPROVED DATE