






ROHS Compliant

REVISIONS

RevNo	Description	Date	Revision	Mender
1				
2				

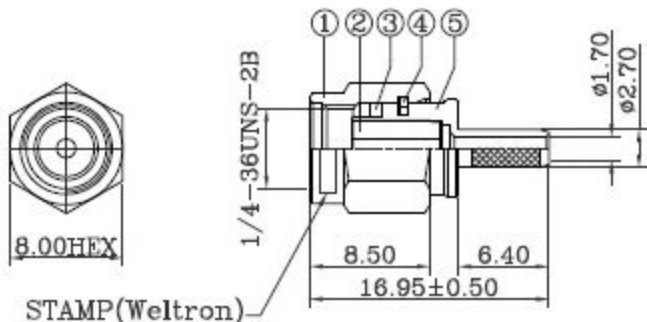

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626

2. GOLD PL. 3 MIN THICK OVER NICKEL PL. 100 MN. THICK OVER COPPER STRIKE

3. JIS H 3250, C 2700

1. CRIMPED FERRULE

HEX CRIMP SIZE .128"

2. CONTACT PIN TO SOLDER

RECOMMENDED
CABLE STRIPPING DIM'S

8	HEAT SHRINK TUBE		1	BLACK
7	FERRULE	NOTE 3	1	NOTE 2
6	CONTACT PIN	Be.copper	1	NOTE 2
5	BODY	NOTE 1	1	NOTE 2
4	RETAINER RING	Be.copper	1	NATURAL
3	GASKET	SILICON	1	RED
2	INSULATOR	TEFLON	1	NATURAL
1	NUT	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

				TITLE			
PART NO. 44-900RP-174				UNITS	MM	RP SMA PLUG CRIMP, 50 OHM FOR RG174, 188, 316 CABLE	
MODEL NO.				SCALE	FT	UNLESS OTHERWISE SPECIFIED TOLERANCES:	
				EDITION	A1	DESIGNED	Xwj
				PUBLISH DATE		DRAWING	Ckq
				2010/01/03		CHECKED	David
						APPROVED	Andy
						3RD ANGLE	